

## TYPES

- Vertical: Carré Plus (CPVN-PLUS)

## TUBES

- Vertical, square 25 x 25 mm

## COLLECTORS

- Horizontal, round Ø 35 mm

## COLOURS

- Standard colour white RAL 9016
- Not available in colour Gloss White
- Extensive colour chart see p. 16

## BRACKETS

- Wall brackets standard

## TECHNICAL

- Welded by means of resistance welding robots (invisible weld seams)
- KTL priming coat, powder coating
- Standard operating pressure: 10 bar
- Maximum operating temperature: 110°C

## ELECTRICAL (see chapter electrical radiators)

- ✗ Pure electrical radiator prefilled
- ✗ Mixed radiator

## TECHNICAL DRAWINGS

- See p. 90

## CONNECTION


- ✓ One-point connection for one-pipe system (order as special radiator) (see p. 301)
- ✓ One-point connection for two-pipe system (order as special radiator) (see p. 301)
- ✓ Two-point connection for one-pipe system (connection by way of the central connection) (see p. 300)
- ✓ Two-point connection for two-pipe system (standard) (see p. 300)
- ✗ Integrated valve




VASCO

STEEL RADIATORS

## RECOMMENDED CONNECTION (1188)



Other connection methods, see p. 89



ref. nr. 118210300000099  
Fittings, see p. 313

## RECOMMENDED FOR THE BATHROOM IN OPTION



towel rail straight (chrome)  
ref. nr. 118320700000099

Other accessories, see p. 88

## ABOUT CARRÉ PLUS VERTICAL

### Minimum clearance, maximum effect

An icon in the world of designer radiators. Vasco developed a whole new type of tube especially for the Carré with sharp corners for an austere design and with optimum thermal efficiency with a minimum clearance. The flat look creates a sense of calm, enhanced by the concealed, beautifully integrated collector. A highly praised designer radiator for which Vasco, as always, also developed the appropriate accessories.




# CARRÉ PLUS VERTICAL (CPVN-PLUS)



CPVN-PLUS


## HOW TO ORDER CARRÉ PLUS VERTICAL

Delivery time 15 - 30 working days  
(transport duration not included)

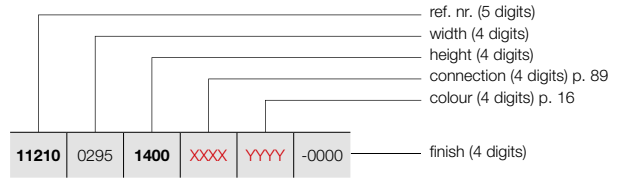

## HOW TO ORDER STOCK RADIATOR CARRÉ PLUS VERTICAL

Delivery time 5 working days  
(transport duration not included)




REFERENCE CODE CUSTOM MADE CARRÉ PLUS VERTICAL							TECHNICAL DATA					short ref. nr. RAL 9016 stock	short ref. nr. M301 stock			
REF. NR.	width (L mm)	height (H mm)	75/65/20 (Watt)	55/45/20 (Watt)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)								
REF. NR. CARRÉ PLUS VERTICAL CPVN-PLUS : 11210																
11210	0295	1400	XXXX	YYYY	-0000	10	295	1400	871	443	1,31	19,70	8,40	-	-	-
		1600				10	295	1600	986	505	1,31	21,60	9,40	-	-	-
		1800				10	295	1800	1097	559	1,32	23,60	10,50	-	11210-01	11210-02
		2000				10	295	2000	1206	614	1,32	26,20	12,00	-	-	-
		2200				10	295	2200	1312	672	1,31	28,90	13,50	-	-	-
11210	0355	1400	XXXX	YYYY	-0000	12	355	1400	1026	521	1,31	23,16	10,08	-	-	-
		1600				12	355	1600	1161	595	1,31	25,44	11,28	-	-	-
		1800				12	355	1800	1293	659	1,32	27,72	12,48	-	-	-
		2000				12	355	2000	1421	724	1,32	30,96	14,40	-	-	-
		2200				12	355	2200	1545	791	1,31	34,08	16,20	-	-	-
11210	0415	1400	XXXX	YYYY	-0000	14	415	1400	1179	599	1,31	26,46	11,76	-	-	-
		1600				14	415	1600	1334	683	1,31	29,12	13,16	-	-	-
		1800				14	415	1800	1485	757	1,32	31,64	14,56	-	11210-03	11210-04
		2000				14	415	2000	1632	836	1,31	35,42	16,66	-	11210-05	-
		2200				14	415	2200	1775	909	1,31	39,20	18,90	-	-	-
11210	0475	1400	XXXX	YYYY	-0000	16	475	1400	1330	676	1,31	29,60	13,28	-	-	-
		1600				16	475	1600	1505	771	1,31	32,48	14,88	-	-	-
		1800				16	475	1800	1675	853	1,32	35,52	16,48	-	-	-
		2000				16	475	2000	1841	943	1,31	39,84	19,04	-	-	-
		2200				16	475	2200	2002	1025	1,31	44,00	21,60	-	-	-
11210	0535	1400	XXXX	YYYY	-0000	18	535	1400	1478	751	1,31	32,58	14,94	-	-	-
		1600				18	535	1600	1673	857	1,31	35,82	16,74	-	-	-
		1800				18	535	1800	1862	954	1,31	39,06	18,54	-	11210-07	11210-08
		2000				18	535	2000	2046	1048	1,31	43,92	21,42	-	11210-09	-
		2200				18	535	2200	2226	1140	1,31	48,78	24,30	-	-	-
11210	0595	1400	XXXX	YYYY	-0000	20	595	1400	1625	826	1,31	35,20	16,60	-	-	-
		1600				20	595	1600	1839	942	1,31	39,00	18,60	-	-	-
		1800				20	595	1800	2047	1048	1,31	42,60	20,40	-	11210-11	11210-15
		2000				20	595	2000	2250	1152	1,31	48,00	23,60	-	11210-12	-
		2200				20	595	2200	2447	1260	1,30	53,40	27,00	-	-	-
11210	0655	1400	XXXX	YYYY	-0000	22	655	1400	1771	900	1,31	37,84	18,26	-	-	-
		1600				22	655	1600	2004	1026	1,31	41,80	20,24	-	-	-
		1800				22	655	1800	2231	1143	1,31	45,76	22,44	-	-	-
		2000				22	655	2000	2451	1255	1,31	51,70	25,96	-	11210-14	-
		2200				22	655	2200	2666	1372	1,30	57,64	29,48	-	-	-
11210	0715	1400	XXXX	YYYY	-0000	24	715	1400	1915	973	1,31	40,32	19,68	-	-	-
		1600				24	715	1600	2167	1110	1,31	44,64	22,08	-	-	-
		1800				24	715	1800	2412	1235	1,31	48,96	24,24	-	-	-
		2000				24	715	2000	2651	1365	1,30	55,44	28,32	-	-	-
		2200				24	715	2200	2883	1484	1,30	61,92	32,16	-	-	-

CE 13 in conformity with EN442-1: radiators and convectors

For heat outputs in other regimes, see p. 308 (correction factors)

### HOW TO ORDER CARRÉ PLUS VERTICAL

Delivery time 15 - 30 working days  
(transport duration not included)

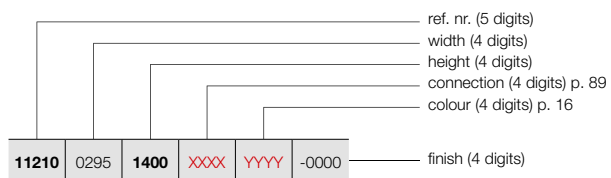

## CARRÉ PLUS VERTICAL (CPVN-PLUS)



CPVN-PLUS

REFERENCE CODE CUSTOM MADE CARRÉ PLUS VERTICAL						TECHNICAL DATA						short ref. nr. RAL 9016 stock	short ref. nr. M301 stock		
						tubes	width (L mm)	height (H mm)	75/65/20 (Watt)	55/45/20 (Watt)	n-exp.			weight (kg)	water content (l)
<b>REF. NR. CARRÉ PLUS VERTICAL CPVN-PLUS : 11210</b>															
<b>11210</b>	0775	<b>1400</b>	XXXX	YYYY	-0000	26	775	1400	2058	1046	1,31	42,64	21,32	-	-
		<b>1600</b>				26	775	1600	2329	1193	1,31	47,32	23,92	-	-
		<b>1800</b>				26	775	1800	2592	1334	1,30	51,74	26,26	-	-
		<b>2000</b>				26	775	2000	2849	1467	1,30	58,76	30,68	-	-
		<b>2200</b>				26	775	2200	3098	1595	1,30	65,78	34,84	-	-
<b>11210</b>	0895	<b>1400</b>	XXXX	YYYY	-0000	30	895	1400	2341	1189	1,31	46,80	24,60	-	-
		<b>1600</b>				30	895	1600	2649	1357	1,31	51,90	27,30	-	-
		<b>1800</b>				30	895	1800	2949	1518	1,30	57,00	30,00	-	-
		<b>2000</b>				30	895	2000	3240	1668	1,30	65,10	35,10	-	-
		<b>2200</b>				30	895	2200	3524	1814	1,30	73,20	40,20	-	-

CE 13 in conformity with EN442-1: radiators and convectors

For heat outputs in other regimes, see p. 308 (correction factors)

## CARRÉ VERTICAL (CPVN2-ZB)



### TYPES

- Two rows (CPVN2-ZB) of tubes

### TUBES

- Vertical, square 25 x 25 mm

### COLLECTORS

- Horizontal, round Ø 35 mm

### COLOURS

- Standard colour white RAL 9016
- Not available in colour Gloss White
- Extensive colour chart see p. 16

### BRACKETS

- Wall brackets standard
- CPVN2-ZB also available as free-standing radiator, see p. 88

### TECHNICAL

- Welded by means of resistance welding robots (invisible weld seams)
- KTL priming coat, powder coating
- Standard operating pressure: 10 bar
- Maximum operating temperature: 110°C

### ELECTRICAL (see chapter electrical radiators)

- ✗ Pure electrical radiator prefilled
- ✗ Mixed radiator

### TECHNICAL DRAWINGS

- See p. 90

### CONNECTION


- ✓ One-point connection for one-pipe system (order as special radiator) (see p. 301)
- ✓ One-point connection for two-pipe system (order as special radiator) (see p. 301)
- ✓ Two-point connection for one-pipe system (connection by way of the central connection) (see p. 300)
- ✓ Two-point connection for two-pipe system (standard) (see p. 300)
- ✗ Integrated valve

### ABOUT CARRÉ VERTICAL


#### Top design with double heat capacity

The sleek, smooth look of the Carré Plus, which has a double row of pipes for maximum heat output. The Carré Vertical designer radiator continues to be its timeless, functional self, but the extra capacity ensures optimum efficiency, even in larger spaces.

### RECOMMENDED CONNECTION (1188)



Other connection methods, see p. 89



ref. nr. 118210300000099  
Fittings, see p. 313

### RECOMMENDED FOR THE BATHROOM IN OPTION




towel rail straight (chrome)  
ref. nr. 118320700000099

Other accessories, see p. 88



### HOW TO ORDER CARRÉ VERTICAL

Delivery time 15 - 30 working days  
(transport duration not included)

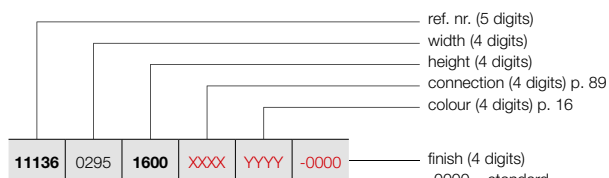


### FREE-STANDING INSTALLATION (CPVN2-ZB)

See p. 88 for additional accessories.

### HOW TO ORDER STOCK RADIATOR CARRÉ VERTICAL

Delivery time 5 working days  
(transport duration not included)



## CARRÉ VERTICAL (CPVN2-ZB)




CPVN2-ZB

REFERENCE CODE CUSTOM MADE CARRÉ VERTICAL						TECHNICAL DATA						short ref. nr. RAL 9016 stock			
						tubes	width (L mm)	height (H mm)	75/65/20 (Watt)	55/45/20 (Watt)	n-exp.		weight (kg)	water content (l)	electr. resistance (Watt)
<b>REF. NR. CARRÉ VERTICAL CPVN2-ZB : 11136</b>															
<b>11136</b>	0295	<b>1600</b>	XXXX	YYYY	-0000	10	295	1600	1062	533	1,35	30,20	15,80	-	-
		<b>1800</b>				10	295	1800	1174	589	1,35	33,80	17,90	-	-
		<b>2000</b>				10	295	2000	1279	642	1,35	37,30	20,10	-	-
		<b>2200</b>				10	295	2200	1377	691	1,35	40,60	21,30	-	-
		<b>2400</b>				10	295	2400	1469	737	1,35	43,80	22,60	-	-
		<b>2600</b>				10	295	2600	1555	780	1,35	47,10	23,90	-	-
		<b>2800</b>				10	295	2800	1635	820	1,35	50,30	25,10	-	-
		<b>3000</b>				10	295	3000	1709	858	1,35	53,60	26,40	-	-
<b>11136</b>	0355	<b>1600</b>	XXXX	YYYY	-0000	12	355	1600	1275	640	1,35	36,24	18,96	-	-
		<b>1800</b>				12	355	1800	1409	707	1,35	40,56	21,48	-	-
		<b>2000</b>				12	355	2000	1534	770	1,35	44,76	24,12	-	-
		<b>2200</b>				12	355	2200	1652	829	1,35	48,72	25,56	-	-
		<b>2400</b>				12	355	2400	1763	885	1,35	52,56	27,12	-	-
		<b>2600</b>				12	355	2600	1866	936	1,35	56,52	28,68	-	-
		<b>2800</b>				12	355	2800	1962	984	1,35	60,36	30,12	-	-
		<b>3000</b>				12	355	3000	2050	1029	1,35	64,32	31,68	-	-
<b>11136</b>	0415	<b>1600</b>	XXXX	YYYY	-0000	14	415	1600	1487	746	1,35	42,28	22,12	-	-
		<b>1800</b>				14	415	1800	1643	824	1,35	47,32	25,06	-	<b>11136-02</b>
		<b>2000</b>				14	415	2000	1790	898	1,35	52,22	28,14	-	<b>11136-01</b>
		<b>2200</b>				14	415	2200	1928	967	1,35	56,84	29,82	-	-
		<b>2400</b>				14	415	2400	2057	1032	1,35	61,32	31,64	-	-
		<b>2600</b>				14	415	2600	2177	1092	1,35	65,94	33,46	-	-
		<b>2800</b>				14	415	2800	2289	1149	1,35	70,42	35,14	-	-
		<b>3000</b>				14	415	3000	2392	1200	1,35	75,04	36,96	-	-
<b>11136</b>	0475	<b>1600</b>	XXXX	YYYY	-0000	16	475	1600	1700	853	1,35	48,32	25,28	-	-
		<b>1800</b>				16	475	1800	1878	942	1,35	54,08	28,64	-	-
		<b>2000</b>				16	475	2000	2046	1027	1,35	59,68	32,16	-	-
		<b>2200</b>				16	475	2200	2203	1105	1,35	64,96	34,08	-	-
		<b>2400</b>				16	475	2400	2351	1180	1,35	70,08	36,16	-	-
		<b>2600</b>				16	475	2600	2488	1248	1,35	75,36	38,24	-	-
		<b>2800</b>				16	475	2800	2616	1313	1,35	80,48	40,16	-	-
		<b>3000</b>				16	475	3000	2734	1372	1,35	85,76	42,24	-	-
<b>11136</b>	0535	<b>1600</b>	XXXX	YYYY	-0000	18	535	1600	1912	959	1,35	54,36	28,44	-	-
		<b>1800</b>				18	535	1800	2113	1060	1,35	60,84	32,22	-	<b>11136-03</b>
		<b>2000</b>				18	535	2000	2301	1155	1,35	67,14	36,18	-	<b>11136-07</b>
		<b>2200</b>				18	535	2200	2479	1244	1,35	73,08	38,34	-	-
		<b>2400</b>				18	535	2400	2644	1327	1,35	78,84	40,68	-	-
		<b>2600</b>				18	535	2600	2799	1404	1,35	84,78	43,02	-	-
		<b>2800</b>				18	535	2800	2942	1476	1,35	90,54	45,18	-	-
		<b>3000</b>				18	535	3000	3075	1543	1,35	96,48	47,52	-	-

CE 05 in conformity with EN442-1: radiators and convectors

For heat outputs in other regimes, see p. 308 (correction factors)


# CARRÉ VERTICAL (CPVN2-ZB)



CPVN2-ZB

## HOW TO ORDER CARRÉ VERTICAL

Delivery time 15 - 30 working days  
(transport duration not included)

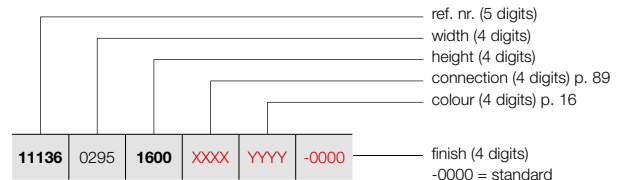


## FREE-STANDING INSTALLATION (CPVN2-ZB)

See p. 88 for additional accessories.

## HOW TO ORDER STOCK RADIATOR CARRÉ VERTICAL

Delivery time 5 working days  
(transport duration not included)



REFERENCE CODE CUSTOM MADE CARRÉ VERTICAL						TECHNICAL DATA					short ref. nr.				
REF. NR.	width (L mm)	height (H mm)	75/65/20 (Watt)	55/45/20 (Watt)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)	short ref. nr. RAL 9016 stock						
REF. NR. CARRÉ VERTICAL CPVN2-ZB : 11136															
11136	0595	1600	XXXX	YYYY	-0000	20	595	1600	2125	1066	1,35	60,40	31,60	-	-
		1800				20	595	1800	2348	1178	1,35	67,60	35,80	-	11136-04
		2000				20	595	2000	2557	1283	1,35	74,60	40,20	-	11136-05
		2200				20	595	2200	2754	1382	1,35	81,20	42,60	-	-
		2400				20	595	2400	2938	1474	1,35	87,60	45,20	-	-
		2600				20	595	2600	3110	1561	1,35	94,20	47,80	-	-
		2800				20	595	2800	3269	1640	1,35	100,60	50,20	-	-
		3000				20	595	3000	3417	1715	1,35	107,20	52,80	-	-
11136	0655	1600	XXXX	YYYY	-0000	22	655	1600	2337	1173	1,35	66,44	34,76	-	-
		1800				22	655	1800	2582	1296	1,35	74,36	39,38	-	-
		2000				22	655	2000	2812	1411	1,35	82,06	44,22	-	11136-13
		2200				22	655	2200	3029	1520	1,35	89,32	46,86	-	-
		2400				22	655	2400	3232	1622	1,35	96,36	49,72	-	-
		2600				22	655	2600	3421	1717	1,35	103,62	52,58	-	-
		2800				22	655	2800	3596	1804	1,35	110,66	55,22	-	-
		3000				22	655	3000	3759	1886	1,35	117,92	58,08	-	-
11136	0715	1600	XXXX	YYYY	-0000	24	715	1600	2550	1280	1,35	72,48	37,92	-	-
		1800				24	715	1800	2817	1413	1,35	81,12	42,96	-	-
		2000				24	715	2000	3069	1540	1,35	89,52	48,24	-	-
		2200				24	715	2200	3305	1658	1,35	97,44	51,12	-	-
		2400				24	715	2400	3526	1769	1,35	105,12	54,24	-	-
		2600				24	715	2600	3732	1873	1,35	113,04	57,36	-	-
		2800				24	715	2800	3923	1968	1,35	120,72	60,24	-	-
		3000				24	715	3000	4101	2058	1,35	128,64	63,36	-	-
11136	0775	1600	XXXX	YYYY	-0000	26	775	1600	2762	1386	1,35	78,52	41,08	-	-
		1800				26	775	1800	3052	1531	1,35	87,88	46,54	-	-
		2000				26	775	2000	3324	1668	1,35	96,98	52,26	-	-
		2200				26	775	2200	3580	1796	1,35	105,56	55,38	-	-
		2400				26	775	2400	3820	1917	1,35	113,88	58,76	-	-
		2600				26	775	2600	4043	2029	1,35	122,46	62,14	-	-
		2800				26	775	2800	4250	2133	1,35	130,78	65,26	-	-
		3000				26	775	3000	4442	2229	1,35	139,36	68,64	-	-
11136	0895	1600	XXXX	YYYY	-0000	30	895	1600	3187	1599	1,35	90,60	47,40	-	-
		1800				30	895	1800	3521	1767	1,35	101,40	53,70	-	-
		2000				30	895	2000	3836	1925	1,35	111,90	60,30	-	11136-19
		2200				30	895	2200	4131	2073	1,35	121,80	63,90	-	-
		2400				30	895	2400	4407	2211	1,35	131,40	67,80	-	-
		2600				30	895	2600	4665	2341	1,35	141,30	71,70	-	-

CE in conformity with EN442-1: radiators and convectors

For heat outputs in other regimes, see p. 308 (correction factors)

## CARRÉ HORIZONTAL (CPHN1-RO, CPHN2-RO)

### TYPES

- One (CPHN1-RO) or two rows (CPHN2-RO) of tubes

### TUBES

- Horizontal, square 25 x 25 mm

### COLLECTORS

- Vertical, round Ø 35 mm

### COLOURS

- Standard colour white RAL 9016
- Not available in colour Gloss White
- Extensive colour chart see p. 16

### SPECIAL

- CPHN1-RO also available as toilet radiator (600 x 415 mm)

### BRACKETS

- Wall brackets standard

### TECHNICAL

- Welded by means of resistance welding robots (invisible weld seams)
- KTL priming coat, powder coating
- Standard operating pressure: 10 bar
- Maximum operating temperature: 110°C

### ELECTRICAL (see chapter electrical radiators)

- ✗ Pure electrical radiator prefilled
- ✗ Mixed radiator

### TECHNICAL DRAWINGS


- See p. 91

### CONNECTION

- ✓ One-point connection for one-pipe system (order as special radiator) (see p. 301)
- ✓ One-point connection for two-pipe system (order as special radiator) (see p. 301)
- ✗ Two-point connection for one-pipe system
- ✓ Two-point connection for two-pipe system (standard) (see p. 300)
- ✗ Integrated valve



### RECOMMENDED CONNECTION (0018)



Other connection methods, see p. 89



ref. nr. 118210100000099  
Fittings, see p. 313

### RECOMMENDED FOR THE BATHROOM IN OPTION



towel rail straight (chrome)  
ref. nr. 118320700000099

Other accessories, see p. 88

### ABOUT CARRÉ HORIZONTAL


#### Top design for all your heating requirements

The horizontal version of the Carré, with your choice of one or two rows of pipes, for customised heat emission in any room. A designer radiator that also in the horizontal version, stands out thanks to its sleek design and flat look, enhanced by the fully integrated collector.


# CARRÉ HORIZONTAL (CPHN1-RO)

## HOW TO ORDER CARRÉ HORIZONTAL

Delivery time 15 - 30 working days  
(transport duration not included)



CPHN1-RO

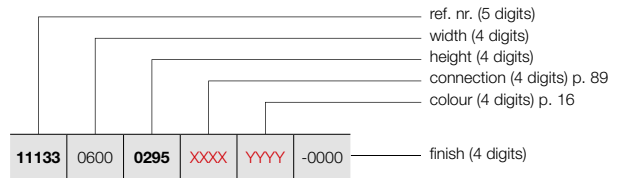

REFERENCE CODE CUSTOM MADE CARRÉ HORIZONTAL						TECHNICAL DATA								
REF. NR.	width (L mm)	height (H mm)	75/65/20 (Watt)	55/45/20 (Watt)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)						
REF. NR. CARRÉ HORIZONTAL CPHN1-RO : 11133														
11133	0600	0295	XXXX	YYYY	-0000	10	600	295	221	117	1,25	6,19	2,85	-
		0355				12	600	355	259	137	1,25	7,41	3,60	-
		0415				14	600	415	296	156	1,25	8,63	4,35	-
		0475				16	600	475	333	176	1,25	9,86	5,10	-
		0535				18	600	535	369	195	1,25	11,08	5,85	-
		0595				20	600	595	404	213	1,25	12,30	6,60	-
		0655				22	600	655	439	231	1,26	13,42	6,94	-
		0775				26	600	775	507	266	1,26	15,67	7,63	-
		0895				30	600	895	574	302	1,26	17,91	8,31	-
		11133				0800	0295	XXXX	YYYY	-0000	10	800	295	295
0355	12		800	355	346		183				1,25	9,88	4,80	-
0415	14		800	415	395		209				1,25	11,51	5,80	-
0475	16		800	475	444		234				1,25	13,14	6,80	-
0535	18		800	535	492		260				1,25	14,77	7,80	-
0595	20		800	595	538		284				1,25	16,40	8,80	-
0655	22		800	655	585		307				1,26	17,90	9,26	-
0775	26		800	775	676		355				1,26	20,89	10,17	-
0895	30		800	895	766		402				1,26	23,88	11,08	-
11133	1000		0295	XXXX	YYYY		-0000				10	1000	295	369
		0355	12			1000		355	432	228	1,25	12,35	6,00	-
		0415	14			1000		415	494	261	1,25	14,39	7,25	-
		0475	16			1000		475	555	293	1,25	16,43	8,50	-
		0535	18			1000		535	615	325	1,25	18,46	9,75	-
		0595	20			1000		595	673	355	1,25	20,50	11,00	-
		0655	22			1000		655	731	384	1,26	22,37	11,57	-
		0775	26			1000		775	845	444	1,26	26,11	12,71	-
		0895	30			1000		895	957	503	1,26	29,85	13,85	-
		11133	1200			0295		XXXX	YYYY	-0000	10	1200	295	443
0355	12			1200	355	518	274				1,25	14,82	7,20	-
0415	14			1200	415	593	313				1,25	17,27	8,70	-
0475	16			1200	475	666	352				1,25	19,72	10,20	-
0535	18			1200	535	738	390				1,25	22,15	11,70	-
0595	20			1200	595	808	427				1,25	24,60	13,20	-
0655	22			1200	655	877	461				1,26	26,84	13,88	-
0775	26			1200	775	1014	533				1,26	31,33	15,25	-
0895	30			1200	895	1148	603				1,26	35,82	16,62	-
11133	1400			0295	XXXX	YYYY	-0000				10	1400	295	517
		0355	12	1400				355	605	319	1,25	17,29	8,40	-
		0415	14	1400				415	692	365	1,25	20,15	10,15	-
		0475	16	1400				475	777	410	1,25	23,00	11,90	-
		0535	18	1400				535	861	455	1,25	25,84	13,65	-
		0595	20	1400				595	942	497	1,25	28,70	15,40	-
		0655	22	1400				655	1023	537	1,26	31,32	16,20	-
		0775	26	1400				775	1183	622	1,26	36,55	17,79	-
		0895	30	1400				895	1340	704	1,26	41,79	19,39	-


CE05 in conformity with EN442-1: radiators and convectors

For heat outputs in other regimes, see p. 308 (correction factors)




### HOW TO ORDER CARRÉ HORIZONTAL

Delivery time 15 - 30 working days  
(transport duration not included)

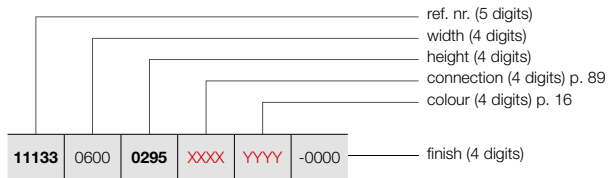


## CARRÉ HORIZONTAL (CPHN1-RO)



CPHN1-RO

REFERENCE CODE CUSTOM MADE CARRÉ HORIZONTAL							TECHNICAL DATA								
11133	0600	0295	XXXX	YYYY	-0000	tubes	width (L mm)	height (H mm)	75/65/20 (Watt)	55/45/20 (Watt)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)	
<b>REF. NR. CARRÉ HORIZONTAL CPHN1-RO : 11133</b>															
11133	0600	0295	XXXX	YYYY	-0000	10	1600	295	590	312	1,25	16,50	7,60	-	
		0355				12		355	691	365	1,25	19,76	9,60	-	
		0415				14		415	790	417	1,25	23,02	11,60	-	
		0475				16		475	888	469	1,25	26,29	13,60	-	
		0535				18		535	984	520	1,25	29,54	15,60	-	
		0595				20		595	1077	569	1,25	32,80	17,60	-	
		0655				22		655	1170	615	1,26	35,79	18,51	-	
		0775				26		775	1352	710	1,26	41,78	20,34	-	
		0895				30		895	1531	804	1,26	47,76	22,16	-	
		11133				1800		0295	XXXX	YYYY	-0000	10	1800	295	664
0355	12		355	778	411		1,25	22,23				10,80		-	
0415	14		415	889	469		1,25	25,90				13,05		-	
0475	16		475	999	528		1,25	29,57				15,30		-	
0535	18		535	1107	585		1,25	33,23				17,55		-	
0595	20		595	1211	639		1,25	36,90				19,80		-	
0655	22		655	1316	691		1,26	40,27				20,83		-	
0775	26		775	1521	799		1,26	47,00				22,88		-	
0895	30		895	1723	905		1,26	53,73				24,93		-	
11133	2000		0295	XXXX	YYYY		-0000	10				2000		295	738
		0355	12			355		864	456	1,25	24,70		12,00	-	
		0415	14			415		988	522	1,25	28,78		14,50	-	
		0475	16			475		1110	586	1,25	32,86		17,00	-	
		0535	18			535		1230	650	1,25	36,92		19,50	-	
		0595	20			595		1346	711	1,25	41,00		22,00	-	
		0655	22			655		1462	768	1,26	44,74		23,14	-	
		0775	26			775		1690	888	1,26	52,22		25,42	-	
		0895	30			895		1914	1006	1,26	59,70		27,70	-	
		11133	2200			0295		XXXX	YYYY	-0000	10		2200	295	812
0355	12			355	950	502	1,25				27,17	13,20		-	
0415	14			415	1087	574	1,25				31,66	15,95		-	
0475	16			475	1221	645	1,25				36,15	18,70		-	
0535	18			535	1353	714	1,25				40,61	21,45		-	
0595	20			595	1481	782	1,25				45,10	24,20		-	
0655	22			655	1608	845	1,26				49,21	25,45		-	
0775	26			775	1859	977	1,26				57,44	27,96		-	
0895	30			895	2105	1106	1,26				65,67	30,47		-	
11133	2400			0295	XXXX	YYYY	-0000				10	2400		295	886
		0355	12	355				1037	548	1,25	29,64		14,40	-	
		0415	14	415				1186	626	1,25	34,54		17,40	-	
		0475	16	475				1332	703	1,25	39,43		20,40	-	
		0535	18	535				1476	779	1,25	44,30		23,40	-	
		0595	20	595				1615	853	1,25	49,20		26,40	-	
		0655	22	655				1754	922	1,26	53,69		27,77	-	
		0775	26	775				2028	1065	1,26	62,66		30,50	-	
		0895	30	895				2297	1207	1,26	71,64		33,24	-	


# CARRÉ HORIZONTAL (CPHN1-RO)



CPHN1-RO

## HOW TO ORDER CARRÉ HORIZONTAL

Delivery time 15 - 30 working days  
(transport duration not included)

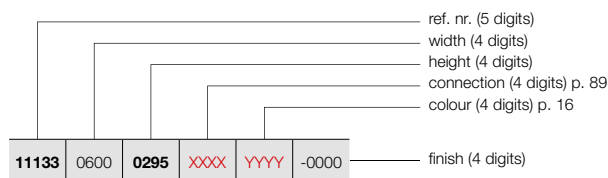


REFERENCE CODE CUSTOM MADE CARRÉ HORIZONTAL						TECHNICAL DATA								
11133	0600	0295	XXXX	YYYY	-0000	tubes	width (L mm)	height (H mm)	75/65/20 (Watt)	55/45/20 (Watt)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)
REF. NR. CARRÉ HORIZONTAL CPHN1-RO : 11133														
11133	2600	0295	XXXX	YYYY	-0000	10	2600	295	959	506	1,25	26,81	12,35	-
		0355				12	2600	355	1123	593	1,25	32,11	15,60	-
		0415				14	2600	415	1284	678	1,25	37,41	18,85	-
		0475				16	2600	475	1443	762	1,25	42,72	22,10	-
		0535				18	2600	535	1599	844	1,25	48,00	25,35	-
		0595				20	2600	595	1750	924	1,25	53,30	28,60	-
		0655				22	2600	655	1901	999	1,26	58,16	30,08	-
		0775				26	2600	775	2197	1154	1,26	67,89	33,05	-
		0895				30	2600	895	2488	1307	1,26	77,61	36,01	-
		11133				2800	0295	XXXX	YYYY	-0000	10	2800	295	1033
0355	12		2800	355	1210		639				1,25	34,58	16,80	-
0415	14		2800	415	1383		730				1,25	40,29	20,30	-
0475	16		2800	475	1554		821				1,25	46,00	23,80	-
0535	18		2800	535	1722		909				1,25	51,69	27,30	-
0595	20		2800	595	1884		995				1,25	57,40	30,80	-
0655	22		2800	655	2047		1075				1,26	62,64	32,40	-
0775	26		2800	775	2366		1243				1,26	73,11	35,59	-
0895	30		2800	895	2680		1408				1,26	83,58	38,78	-
11133	3000		0295	XXXX	YYYY		-0000				10	3000	295	1107
		0355	12			3000		355	1296	684	1,25	37,05	18,00	-
		0415	14			3000		415	1482	783	1,25	43,17	21,75	-
		0475	16			3000		475	1665	879	1,25	49,29	25,50	-
		0535	18			3000		535	1845	974	1,25	55,38	29,25	-
		0595	20			3000		595	2019	1066	1,25	61,50	33,00	-
		0655	22			3000		655	2193	1152	1,26	67,11	34,71	-
		0775	26			3000		775	2535	1332	1,26	78,33	38,13	-
		0895	30			3000		895	2871	1508	1,26	89,55	41,55	-

CE in conformity with EN442-1: radiators and convectors


For heat outputs in other regimes, see p. 308 (correction factors)

**HOW TO ORDER CARRÉ HORIZONTAL**

Delivery time 15 - 30 working days  
(transport duration not included)

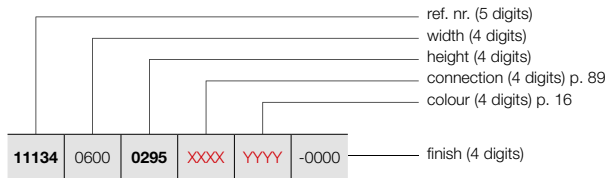

**CARRÉ HORIZONTAL (CPHN2-RO)**



CPHN2-RO

REFERENCE CODE CUSTOM MADE CARRÉ HORIZONTAL							TECHNICAL DATA								
11134	0600	0295	XXXX	YYYY	-0000	tubes	width (L mm)	height (H mm)	75/65/20 (Watt)	55/45/20 (Watt)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)	
<b>REF. NR. CARRÉ HORIZONTAL CPHN2-RO : 11134</b>															
11134	0600	0295	XXXX	YYYY	-0000	10	600	295	377	200	1,24	11,94	6,06	-	
		0355				12	600	355	459	242	1,25	14,26	7,27	-	
		0415				14	600	415	539	282	1,27	16,57	8,48	-	
		0475				16	600	475	617	321	1,28	18,89	9,70	-	
		0535				18	600	535	693	359	1,29	21,20	10,91	-	
		0595				20	600	595	766	394	1,30	23,52	12,12	-	
		0655				22	600	655	836	430	1,30	25,85	13,39	-	
		0775				26	600	775	967	498	1,30	30,50	15,94	-	
		0895				30	600	895	1087	560	1,30	35,16	18,48	-	
		11134				0800	0295	XXXX	YYYY	-0000	10	800	295	503	267
0355	12		800	355	612		323				1,25	19,01	9,70	-	
0415	14		800	415	719		376				1,27	22,10	11,31	-	
0475	16		800	475	823		428				1,28	25,18	12,93	-	
0535	18		800	535	924		478				1,29	28,27	14,54	-	
0595	20		800	595	1021		526				1,30	31,36	16,16	-	
0655	22		800	655	1114		573				1,30	34,46	17,86	-	
0775	26		800	775	1290		664				1,30	40,67	21,25	-	
0895	30		800	895	1449		746				1,30	46,88	24,64	-	
11134	1000		0295	XXXX	YYYY		-0000				10	1000	295	629	334
		0355	12			1000		355	765	404	1,25	23,76	12,12	-	
		0415	14			1000		415	899	470	1,27	27,62	14,14	-	
		0475	16			1000		475	1029	535	1,28	31,48	16,16	-	
		0535	18			1000		535	1155	598	1,29	35,34	18,18	-	
		0595	20			1000		595	1276	657	1,30	39,20	20,20	-	
		0655	22			1000		655	1393	717	1,30	43,08	22,32	-	
		0775	26			1000		775	1612	830	1,30	50,84	26,56	-	
		0895	30			1000		895	1811	932	1,30	58,60	30,80	-	
		11134	1200			0295		XXXX	YYYY	-0000	10	1200	295	755	401
0355	12			1200	355	918	485				1,25	28,51	14,54	-	
0415	14			1200	415	1079	564				1,27	33,14	16,97	-	
0475	16			1200	475	1235	642				1,28	37,78	19,39	-	
0535	18			1200	535	1386	717				1,29	42,41	21,82	-	
0595	20			1200	595	1531	788				1,30	47,04	24,24	-	
0655	22			1200	655	1672	861				1,30	51,70	26,78	-	
0775	26			1200	775	1934	996				1,30	61,01	31,87	-	
0895	30			1200	895	2173	1119				1,30	70,32	36,96	-	
11134	1400			0295	XXXX	YYYY	-0000				10	1400	295	881	468
		0355	12	1400				355	1071	566	1,25	33,26	16,97	-	
		0415	14	1400				415	1259	658	1,27	38,67	19,80	-	
		0475	16	1400				475	1441	749	1,28	44,07	22,62	-	
		0535	18	1400				535	1617	837	1,29	49,48	25,45	-	
		0595	20	1400				595	1786	919	1,30	54,88	28,28	-	
		0655	22	1400				655	1950	1004	1,30	60,31	31,25	-	
		0775	26	1400				775	2257	1162	1,30	71,18	37,18	-	
		0895	30	1400				895	2535	1305	1,30	82,04	43,12	-	


CE 05 in conformity with EN442-1: radiators and convectors

For heat outputs in other regimes, see p. 308 (correction factors)


# CARRÉ HORIZONTAL (CPHN2-RO)

## HOW TO ORDER CARRÉ HORIZONTAL

Delivery time 15 - 30 working days  
(transport duration not included)



CPHN2-RO

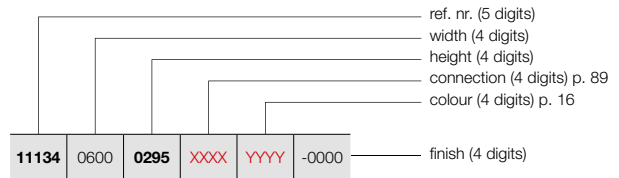


REFERENCE CODE CUSTOM MADE CARRÉ HORIZONTAL						TECHNICAL DATA								
REF. NR.	width (L mm)	height (H mm)	75/65/20 (Watt)	55/45/20 (Watt)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)						
REF. NR. CARRÉ HORIZONTAL CPHN2-RO : 11134														
11134	1600	0295	XXXX	YYYY	-0000	10	1600	295	1006	534	1,24	31,84	16,16	-
		0355				12	1600	355	1224	646	1,25	38,02	19,39	-
		0415				14	1600	415	1438	752	1,27	44,19	22,62	-
		0475				16	1600	475	1646	856	1,28	50,37	25,86	-
		0535				18	1600	535	1848	956	1,29	56,54	29,09	-
		0595				20	1600	595	2042	1051	1,30	62,72	32,32	-
		0655				22	1600	655	2229	1147	1,30	68,93	35,71	-
		0775				26	1600	775	2579	1328	1,30	81,34	42,50	-
		0895				30	1600	895	2898	1492	1,30	93,76	49,28	-
		11134				1800	0295	XXXX	YYYY	-0000	10	1800	295	1132
0355	12		1800	355	1377		727				1,25	42,77	21,82	-
0415	14		1800	415	1618		846				1,27	49,72	25,45	-
0475	16		1800	475	1852		963				1,28	56,66	29,09	-
0535	18		1800	535	2079		1076				1,29	63,61	32,72	-
0595	20		1800	595	2297		1182				1,30	70,56	36,36	-
0655	22		1800	655	2507		1290				1,30	77,54	40,18	-
0775	26		1800	775	2902		1494				1,30	91,51	47,81	-
0895	30		1800	895	3260		1678				1,30	105,48	55,44	-
11134	2000		0295	XXXX	YYYY		-0000				10	2000	295	1258
		0355	12			2000		355	1530	808	1,25	47,52	24,24	-
		0415	14			2000		415	1798	940	1,27	55,24	28,28	-
		0475	16			2000		475	2058	1070	1,28	62,96	32,32	-
		0535	18			2000		535	2310	1195	1,29	70,68	36,36	-
		0595	20			2000		595	2552	1314	1,30	78,40	40,40	-
		0655	22			2000		655	2786	1434	1,30	86,16	44,64	-
		0775	26			2000		775	3224	1660	1,30	101,68	53,12	-
		0895	30			2000		895	3622	1864	1,30	117,20	61,60	-
		11134	2200			0295		XXXX	YYYY	-0000	10	2200	295	1384
0355	12			2200	355	1683	889				1,25	52,27	26,66	-
0415	14			2200	415	1978	1034				1,27	60,76	31,11	-
0475	16			2200	475	2264	1177				1,28	69,26	35,55	-
0535	18			2200	535	2541	1315				1,29	77,75	40,00	-
0595	20			2200	595	2807	1445				1,30	86,24	44,44	-
0655	22			2200	655	3065	1578				1,30	94,78	49,10	-
0775	26			2200	775	3546	1825				1,30	111,85	58,43	-
0895	30			2200	895	3984	2051				1,30	128,92	67,76	-
11134	2400			0295	XXXX	YYYY	-0000				10	2400	295	1510
		0355	12	2400				355	1836	970	1,25	57,02	29,09	-
		0415	14	2400				415	2158	1128	1,27	66,29	33,94	-
		0475	16	2400				475	2470	1284	1,28	75,55	38,78	-
		0535	18	2400				535	2772	1434	1,29	84,82	43,63	-
		0595	20	2400				595	3062	1576	1,30	94,08	48,48	-
		0655	22	2400				655	3343	1721	1,30	103,39	53,57	-
0775	26	2400	775	3869	1992	1,30	122,02	63,74	-					

CE in conformity with EN442-1: radiators and convectors


For heat outputs in other regimes, see p. 308 (correction factors)

**HOW TO ORDER CARRÉ HORIZONTAL**

Delivery time 15 - 30 working days  
(transport duration not included)

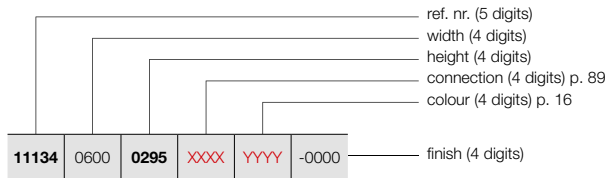

**CARRÉ HORIZONTAL (CPHN2-RO)**



CPHN2-RO

REFERENCE CODE CUSTOM MADE CARRÉ HORIZONTAL						TECHNICAL DATA								
						tubes	width (L mm)	height (H mm)	75/65/20 (Watt)	55/45/20 (Watt)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)
<b>REF. NR. CARRÉ HORIZONTAL CPHN2-RO : 11134</b>														
<b>11134</b>	2600	<b>0295</b>	<b>XXXX</b>	<b>YYYY</b>	<b>-0000</b>	10	2600	295	1635	868	1,24	51,74	26,26	-
		<b>0355</b>				12	2600	355	1989	1050	1,25	61,78	31,51	-
		<b>0415</b>				14	2600	415	2337	1222	1,27	71,81	36,76	-
		<b>0475</b>				16	2600	475	2675	1391	1,28	81,85	42,02	-
		<b>0535</b>				18	2600	535	3003	1554	1,29	91,88	47,27	-
		<b>0595</b>				20	2600	595	3318	1708	1,30	101,92	52,52	-
		<b>0655</b>				22	2600	655	3622	1864	1,30	112,01	58,03	-
		<b>0775</b>				26	2600	775	4191	2157	1,30	132,18	69,06	-
<b>11134</b>	2800	<b>0295</b>	<b>XXXX</b>	<b>YYYY</b>	<b>-0000</b>	10	2800	295	1761	935	1,24	55,72	28,28	-
		<b>0355</b>				12	2800	355	2142	1131	1,25	66,53	33,94	-
		<b>0415</b>				14	2800	415	2517	1316	1,27	77,34	39,59	-
		<b>0475</b>				16	2800	475	2881	1498	1,28	88,14	45,25	-
		<b>0535</b>				18	2800	535	3234	1673	1,29	98,95	50,90	-
		<b>0595</b>				20	2800	595	3573	1839	1,30	109,76	56,56	-
		<b>0655</b>				22	2800	655	3900	2008	1,30	120,62	62,50	-
		<b>11134</b>				3000	<b>0295</b>	<b>XXXX</b>	<b>YYYY</b>	<b>-0000</b>	10	3000	295	1887
<b>0355</b>	12		3000	355	2295		1212				1,25	71,28	36,36	-
<b>0415</b>	14		3000	415	2697		1410				1,27	82,86	42,42	-
<b>0475</b>	16		3000	475	3087		1605				1,28	94,44	48,48	-
<b>0535</b>	18		3000	535	3465		1793				1,29	106,02	54,54	-
<b>0595</b>	20		3000	595	3828		1970				1,30	117,60	60,60	-
<b>0655</b>	22		3000	655	4179		2151				1,30	129,24	66,96	-

CE05 in conformity with EN442-1: radiators and convectors

For heat outputs in other regimes, see p. 308 (correction factors)



**TUBES**

- Horizontal, square 25 x 25 mm

**COLLECTORS**

- Vertical, round Ø 35 mm

**COLOURS**

- Standard colour white RAL 9016
- Not available in colour Gloss White
- Extensive colour chart see p. 16

**BRACKETS**

- Wall brackets standard

**TECHNICAL**

- Welded by means of resistance welding robots (invisible weld seams)
- KTL priming coat, powder coating
- Standard operating pressure: 10 bar
- Maximum operating temperature: 110°C

**ELECTRICAL** (see chapter electrical radiators)

- ✓ Pure electrical radiator prefilled
- ✓ Mixed radiator

**TECHNICAL DRAWINGS**

- See p. 91

**CONNECTION**


- ✗ One-point connection for one-pipe system
- ✗ One-point connection for two-pipe system
- ✓ Two-point connection for one-pipe system (connection by way of the central connection) (see p. 300)
- ✓ Two-point connection for two-pipe system (standard) (see p. 300)
- ✗ Integrated valve
- For connection at the top 45, 54 a special flow tube has to be ordered separately, which needs to be mounted in the return, see p. 303.

**ABOUT CARRÉ BATHROOM**


**A one piece bathroom radiator**

The Carré Bathroom, now also with centre connection, continues to charm us by its pure, architectural design and its striking simplicity. Everything about this bathroom radiator is unique and unsurpassed: the perfect uniformity, the surprisingly high heat output and superior technicality. Because behind the automatic design hides a lot of technological ingenuity that is passed down to the smallest details.

**RECOMMENDED CONNECTION (1188)**



Other connection methods, see p. 89



ref. nr. 118210300000099  
Fittings, see p. 313

**RECOMMENDED FOR THE BATHROOM IN OPTION**




towel rail straight (chrome)  
ref. nr. 118320700000099

Other accessories, see p. 88



### HOW TO ORDER CARRÉ BATHROOM

Delivery time 15 - 30 working days  
(transport duration not included)

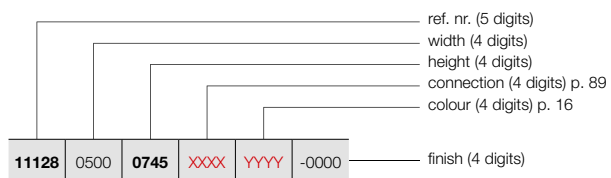


### CARRÉ BATHROOM (CB)



CB

### HOW TO ORDER STOCK RADIATOR CARRÉ BATHROOM

Delivery time 5 working days  
(transport duration not included)



REFERENCE CODE CUSTOM MADE CARRÉ BATHROOM	TECHNICAL DATA										short ref. nr. RAL 9016 stock	short ref. nr. M301 stock				
	tubes	width (L mm)	height (H mm)	75/65/20 (Watt)	55/45/20 (Watt)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)							
<b>REF. NR. CARRÉ BATHROOM CB : 11128</b>																
<b>11128</b>	0500	<b>0745</b>	<b>XXXX</b>	<b>YYYY</b>	-0000	21	500	745	438	235	1,22	12,80	6,20	300	-	-
		<b>1375</b>				40	500	1375	747	399	1,23	22,95	11,80	750	<b>11128-12</b>	<b>11128-08</b>
		<b>1735</b>				50	500	1735	925	493	1,23	29,00	14,80	1000	<b>11128-21</b>	<b>11128-17</b>
<b>11128</b>	0600	<b>0745</b>	<b>XXXX</b>	<b>YYYY</b>	-0000	21	600	745	521	278	1,23	14,35	7,30	500	-	-
		<b>1375</b>				40	600	1375	886	473	1,23	27,35	13,90	750	<b>11128-15</b>	<b>11128-01</b>
		<b>1735</b>				50	600	1735	1089	581	1,23	33,35	17,20	1000	<b>11128-24</b>	<b>11128-04</b>

CE 05 in conformity with EN442-1: radiators and convectors

For heat outputs in other regimes, see p. 308 (correction factors)

## CARRÉ HALF-ROUND (CR-O)



### TUBES

- Vertical, square 25 x 25 mm

### COLLECTORS

- Horizontal, round Ø 35 mm

### COLOURS

- Standard colour white RAL 9016
- Not available in colour Gloss White
- Extensive colour chart see p. 16

### SPECIAL

- Available in 2 versions: R150 and R190

### BRACKETS

- Wall brackets standard

### TECHNICAL

- Welded by means of resistance welding robots (invisible weld seams)
- KTL priming coat, powder coating
- Standard operating pressure: 10 bar
- Maximum operating temperature: 110°C

### ELECTRICAL (see chapter electrical radiators)

- ✗ Pure electrical radiator prefilled
- ✗ Mixed radiator

### TECHNICAL DRAWINGS

- See p. 92

### CONNECTION


- ✗ One-point connection for one-pipe system
- ✗ One-point connection for two-pipe system
- ✗ Two-point connection for one-pipe system
- ✓ Two-point connection for two-pipe system (standard) (see p. 300)
- ✗ Integrated valve

### ABOUT CARRÉ HALF-ROUND

#### Rhythmic, playful, decorative

The sleek, flat structure of the Carré designer radiator manages to surprise, even in the half-round version, with its simple, rhythmic lines. The Carré Half-Round embellishes your living environment with its playful design and provides you with evenly distributed heating comfort. Available with an optional half-round towel rail.

### RECOMMENDED CONNECTION (0018)



ref. nr. 118210100000099  
Fittings, see p. 313

### RECOMMENDED FOR THE BATHROOM IN OPTION



towel rail round (aluminium)  
ref. nr. 118321000000000 (350 mm)


Other accessories, see p. 88





### HOW TO ORDER CARRÉ HALF-ROUND

Delivery time 15 - 30 working days  
(transport duration not included)

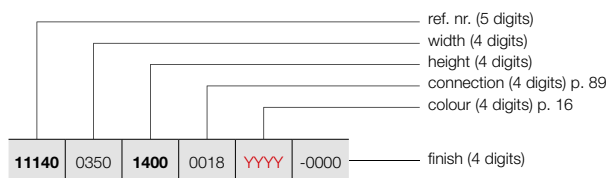


### CARRÉ HALF-ROUND (CR-O)



CR-O

### HOW TO ORDER STOCK RADIATOR CARRÉ HALF-ROUND

Delivery time 5 working days  
(transport duration not included)



REFERENCE CODE CUSTOM MADE CARRÉ HALF-ROUND	TECHNICAL DATA															
	tubes	width (L mm)	height (H mm)	75/65/20 (Watt)	55/45/20 (Watt)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)	short ref. nr. RAL 9016 stock	short ref. nr. M301 stock					
<b>REF. NR. CARRÉ HALF-ROUND CR-O : 11140</b>																
<b>11140</b>	0350	<b>1400</b>	0018	YYY	-0000	16	350	1400	1225	640	1,27	22,70	12,00	-	-	-
		<b>1800</b>				16	350	1800	1528	799	1,27	27,85	15,20	-	<b>11140-06</b>	<b>11140-01</b>
		<b>2000</b>				16	350	2000	1676	876	1,27	31,18	16,85	-	-	-
		<b>2200</b>				16	350	2200	1823	953	1,27	34,50	18,50	-	-	-
<b>11140</b>	0430	<b>1400</b>	0018	YYY	-0000	20	430	1400	1588	834	1,26	28,45	15,05	-	-	-
		<b>1800</b>				20	430	1800	1981	1041	1,26	35,60	18,95	-	-	-
		<b>2000</b>				20	430	2000	2174	1142	1,26	39,83	21,05	-	-	-
		<b>2200</b>				20	430	2200	2364	1242	1,26	44,05	23,15	-	-	-

CE05 in conformity with EN442-1: radiators and convectors

For heat outputs in other regimes, see p. 308 (correction factors)

## CARRÉ QUARTER-ROUND (CR-A)



### TUBES

- Vertical, square 25 x 25 mm

### COLLECTORS

- Horizontal, round Ø 35 mm

### COLOURS

- Standard colour white RAL 9016
- Not available in colour Gloss White
- Extensive colour chart see p. 16

### SPECIAL

- Available in 2 versions: R150 and R190

### BRACKETS

- Wall brackets standard

### TECHNICAL

- Welded by means of resistance welding robots (invisible weld seams)
- KTL priming coat, powder coating
- Standard operating pressure: 10 bar
- Maximum operating temperature: 110°C

### ELECTRICAL (see chapter electrical radiators)

- ✗ Pure electrical radiator prefilled
- ✗ Mixed radiator

### TECHNICAL DRAWINGS

- See p. 92

### CONNECTION


- ✗ One-point connection for one-pipe system
- ✗ One-point connection for two-pipe system
- ✗ Two-point connection for one-pipe system
- ✓ Two-point connection for two-pipe system (standard) (see p. 300)
- ✗ Integrated valve

### ABOUT CARRÉ QUARTER-ROUND

#### Embellishes and heats at the same time

The Carré Quarter-Round distinguishes itself by its beautifully stylised, decorative profile. A designer radiator that brings both tranquillity and life to your living environment, with the comforting assurance of custom fast heating. Available with an optional quarter-round towel rail.

### RECOMMENDED CONNECTION (0018)



ref. nr. 118210100000099  
Fittings, see p. 313

### RECOMMENDED FOR THE BATHROOM IN OPTION




towel rail round (aluminium)  
ref. nr. 118320800000000 (244 mm)

Other accessories, see p. 88



### HOW TO ORDER CARRÉ QUARTER-ROUND

Delivery time 15 - 30 working days  
(transport duration not included)

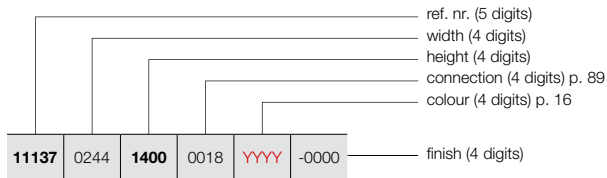


## CARRÉ QUARTER-ROUND (CR-A)



CR-A

### HOW TO ORDER STOCK RADIATOR CARRÉ QUARTER-ROUND

Delivery time 5 working days  
(transport duration not included)




REFERENCE CODE CUSTOM MADE CARRÉ QUARTER-ROUND						TECHNICAL DATA							short ref. nr. RAL 9016 stock		
						tubes	width (L mm)	height (H mm)	75/65/20 (Watt)	55/45/20 (Watt)	n-exp.	weight (kg)		water content (l)	electr. resistance (Watt)
<b>REF. NR. CARRÉ QUARTER-ROUND CR-A : 11137</b>															
<b>11137</b>	0244	<b>1400</b>	0018	YYYY	-0000	8	244	1400	610	316	1,29	11,30	5,50	-	-
		<b>1800</b>				8	244	1800	785	408	1,28	14,30	6,00	-	-
		<b>2000</b>				8	244	2000	862	448	1,28	16,00	7,15	-	-
		<b>2200</b>				8	244	2200	933	485	1,28	17,70	8,30	-	-
<b>11137</b>	0298	<b>1400</b>	0018	YYYY	-0000	10	298	1400	810	426	1,26	14,25	7,50	-	-
		<b>1800</b>				10	298	1800	963	503	1,27	17,75	9,50	-	<b>11137-06</b>
		<b>2000</b>				10	298	2000	1095	572	1,27	19,78	10,55	-	-
		<b>2200</b>				10	298	2200	1227	645	1,26	21,80	11,60	-	-

CE 12 in conformity with EN442-1: radiators and convectors

For heat outputs in other regimes, see p. 308 (correction factors)

## CARRÉ FREE-STANDING INSTALLATION IN OPTION

ACCESSORIES		COLOUR	REF.NR.
FREE-STANDING INSTALLATION		<b>CPVN2-ZB</b>	
		RAL 9016	*
		COLOUR	*


- free-standing radiators in the colour RAL 9016 and Pergamon: 1 separate lateral support, 2 feet (H=150 mm) and 2 rosets in the colour of the radiator.
- free-standing radiators in other colours: 1 separate lateral support, 2 feet (H=150 mm) in the colour of the radiator and 2 chrome plated rosets.
- Please indicate **code -0001** for "Finish" when ordering.

## CARRÉ ACCESSORIES IN OPTION


ACCESSORIES	WIDTH RADIATOR	COLOUR	REF.NR.
SQUARE HOOK	<b>CPVN-PLUS / CPVN2-ZB / CPHN1-RO / CPHN2-RO / CB / CR-O / CR-A</b>		
		CHROME	11835000000099
	<ul style="list-style-type: none"> <li>h = 24 mm; b = 24 mm; d = 65 mm</li> </ul>		
TOWEL RAIL STRAIGHT	<b>CPVN-PLUS / CPVN2-ZB / CPHN1-RO / CPHN2-RO / CB</b>		
		CHROME	11832070000099
	<ul style="list-style-type: none"> <li>h = 24 mm; b = 720 mm (easy adjustable); d = 66 mm; a = 48 mm</li> </ul>		
TOWEL RAIL ROUND	<b>CR-O</b>		
	350 mm	ALUMINIUM	11832100000000
	430 mm	ALUMINIUM	11832110000000
	<ul style="list-style-type: none"> <li>Towel rail round CR-O 350 mm; h = 40 mm; b = 518 mm; d = 65 mm; a = 50 mm</li> <li>Towel rail round CR-O 430 mm; h = 40 mm; b = 598 mm; d = 65 mm; a = 50 mm</li> </ul>		
TOWEL RAIL ROUND	<b>CR-A</b>		
	244 mm	ALUMINIUM	11832080000000
	298 mm	ALUMINIUM	11832090000000
	<ul style="list-style-type: none"> <li>Towel rail round CR-A 244 mm; h = 40 mm; b = 335 mm; d = 65 mm; a = 50 mm</li> <li>Towel rail round CR-A 298 mm; h = 40 mm; b = 386 mm; d = 65 mm; a = 50 mm</li> </ul>		

d = distance front of the accessory up to front of the radiator  
a = distance accessory up to the radiator  
**available from stock**


**CARRÉ PLUS VERTICAL: CPVN-PLUS (STOCK)**  
**CARRÉ VERTICAL: CPVN2-ZB (STOCK)**

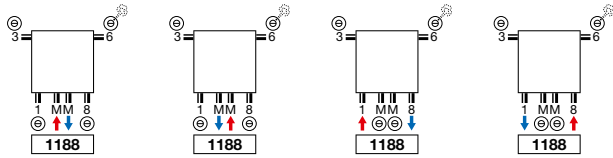



**CARRÉ PLUS VERTICAL: CPVN-PLUS (NON STOCK)**  
**CARRÉ VERTICAL: CPVN2-ZB (NON STOCK)**

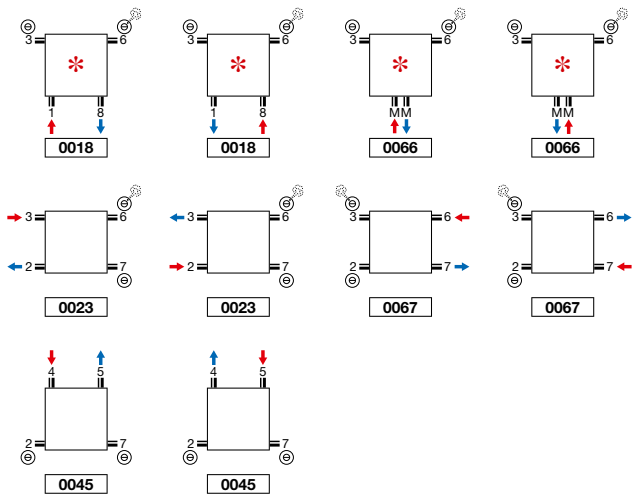

**CARRÉ HORIZONTAL: CPHN1-RO / CPHN2-RO**

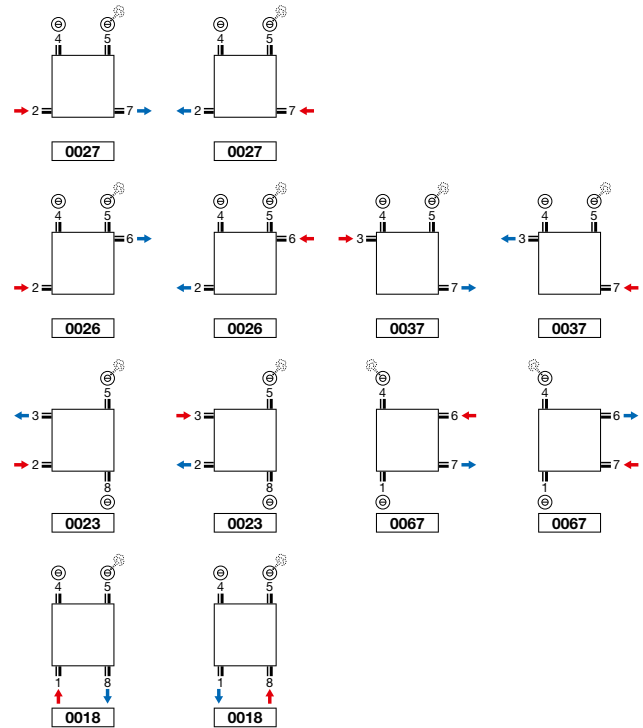


**CARRÉ BATHROOM: CB (STOCK) / CB (NON STOCK)**

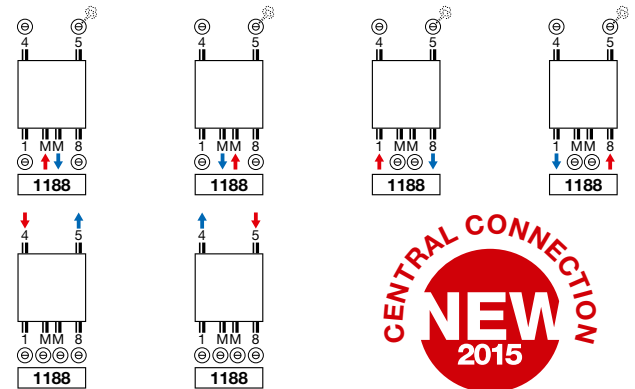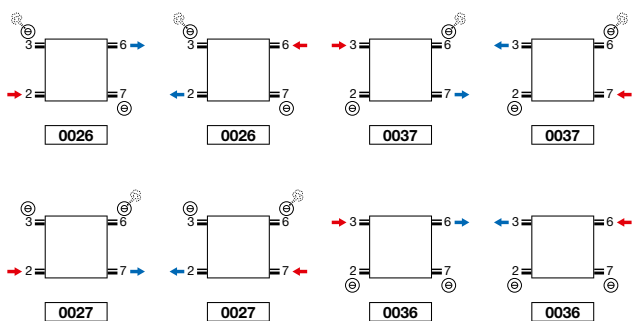


\* Attention CPVN-PLUS/CPVN2-ZB 10 tubes: 2/3/6/7 always open.

**CARRÉ HALF-ROUND: CR-O**  
**CARRÉ QUARTER-ROUND: CR-A**



**CARRÉ BATHROOM: CB (NON STOCK)**

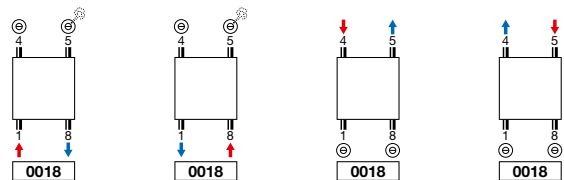


**CARRÉ QUARTER-ROUND: CR-A**



• The connection pipes must be mounted perpendicular to the wall!

**Attention:** connecting the radiator can only be as shown by the connecting icons. For any other connection method, we take no responsibility.


**CARRÉ PLUS VERTICAL (CPVN-PLUS)**

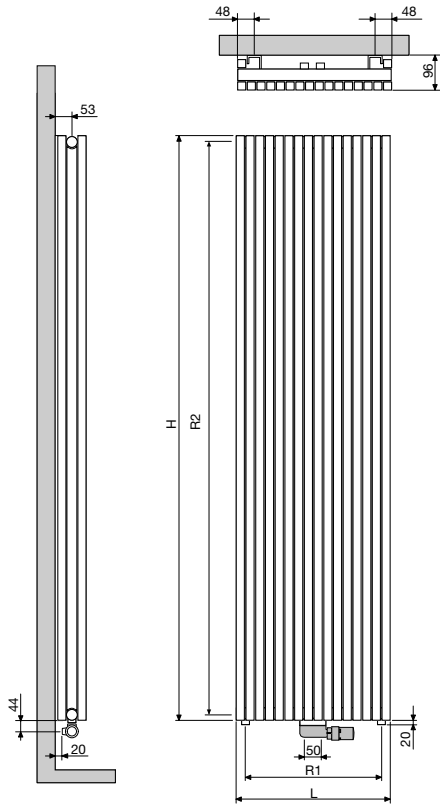

**CPVN-PLUS**

Number of tubes	10	12	14	16	18	20	22	26	30
Width (L)	295	355	415	475	535	595	655	775	895
Centre between the connections at the bottom (R1)	240	300	360	420	480	540	600	720	840
Height (H)	1400	1600	1800	2000	2200				
Centre between the lateral connections 23/67 (R2)	1365	1565	1765	1965	2165				
Centre between the brackets	L-200	H-290							


**CARRÉ VERTICAL (CPVN2-ZB)**

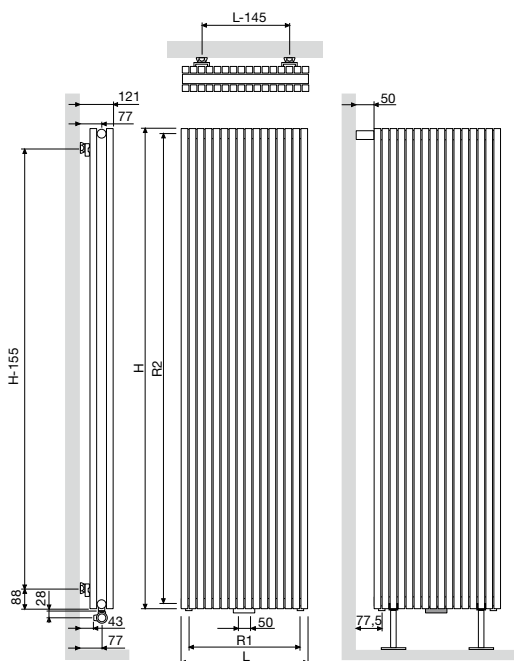

**CPVN2-ZB**

Number of tubes	10	12	14	16	18	20	22	26	30
Width (L)	295	355	415	475	535	595	655	775	895
Centre between the connections at the bottom (R1)	240	300	360	420	480	540	600	720	840
Height (H)	1400	1600	1800	2000	2200	2400	2600	2800	3000
Centre between the lateral connections 23/67 (R2)	1365	1565	1765	1965	2165	2365	2565	2765	2965
Centre between the brackets	L-145	H-155							


### CARRÉ HORIZONTAL (CPHN1-RO, CPHN2-RO)

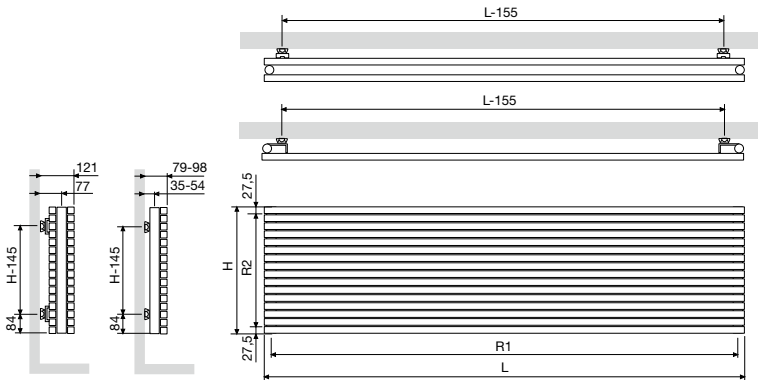

**CPHN1-RO / CPHN2-RO**


	600	800	1000	1200	1400	1600	1800	2000	2200	2400	2600	2800	3000
Width (L)	600	800	1000	1200	1400	1600	1800	2000	2200	2400	2600	2800	3000
Centre between the connections at the bottom 18 (R1)	565	765	965	1165	1365	1565	1765	1965	2165	2365	2565	2765	2965
Height (H)	295	355	415	475	535	595	655	715	775	835			
Centre between the lateral connections 23/67 (R2)	240	300	360	420	480	540	600	660	720	780			
Centre between the brackets	L-155	H-145											

### CARRÉ BATHROOM (CB)

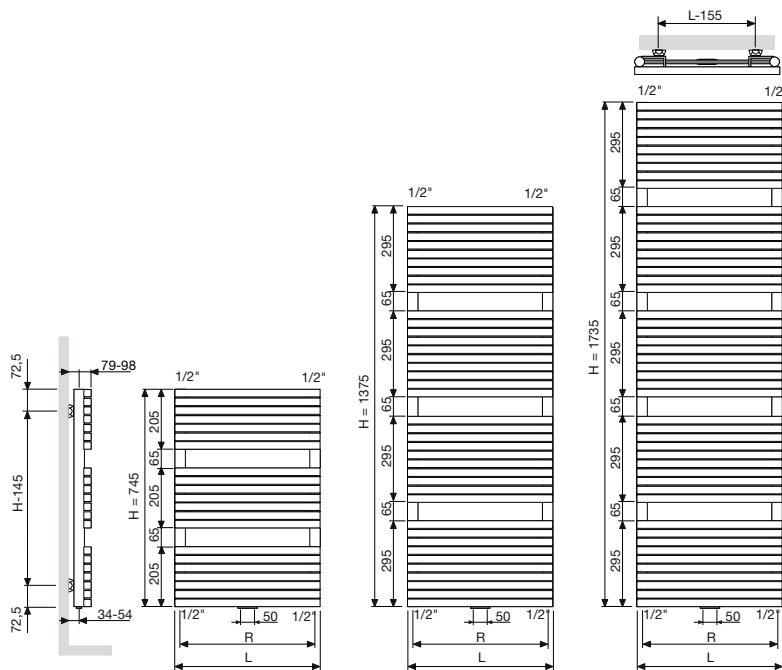


	500	600
Width (L)	500	600
Centre between the connections at the bottom 18 (R)	465	565
Centre between the brackets	L-155	H-145

CARRÉ HALF-ROUND (CR-O)

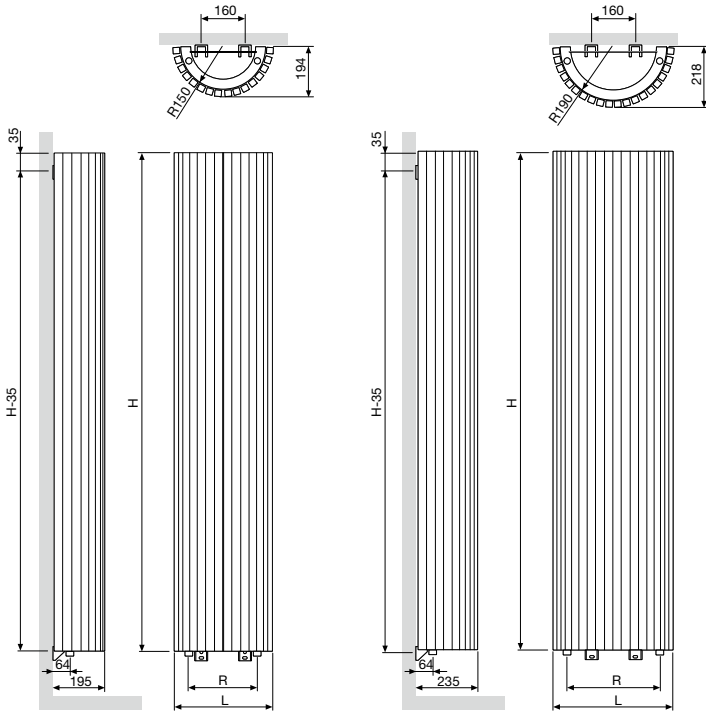

	CR-O	
Width (L)	350	430
Centre between the connections at the bottom 18 (R)	249	333
Centre between the brackets	H-35	

CARRÉ QUARTER-ROUND (CR-A)

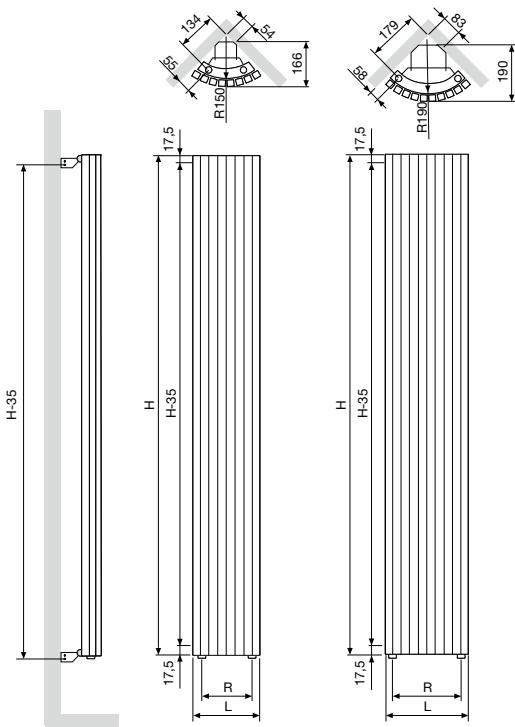

	CR-A	
Width (L)	244	298
Centre between the connections at the bottom 18 (R)	112	171
Centre between the brackets	H-35	