

TYPES

- Single (N1L1) and double (N2L1)

COLOURS

- Standard colour S600 (fine texture white)
- Not available in colours Gloss White and Jet Black
- Extensive colour see p. 16

SPECIAL

- The Niva Vertical Lacquered is available with a lacquered front plate (this means steel plate radiator + lacquered front plate).

BRACKETS

- Wall brackets in the colour RAL 7016 (anthracite grey) standard. Also in option available in the colour S600 (see p. 62).

TECHNICAL

- Electrically welded by means of resistance welding robots (invisible weld seams)
- KTL priming coat, powder coating
- Standard operating pressure: 10 bar
- Maximum operating temperature: 110°C

ELECTRICAL (see chapter electrical radiators)

- ✓ Pure electrical radiator prefilled (see p. 289)
- ✗ Mixed radiator

TECHNICAL DRAWINGS


- See p. 66

CONNECTION


- ✗ One-point connection for one-pipe system
- ✗ One-point connection for two-pipe system
- ✓ Two-point connection for one-pipe system (connection by way of the central connection) (see p. 300)
- ✓ Two-point connection for two-pipe system (standard) (see p. 300)
- ✗ Integrated valve



RECOMMENDED CONNECTION (1188)



Other connection methods, see p. 65



ref. nr. 118210300000099
Fittings, see p. 313

**RECOMMENDED FOR THE BATHROOM
IN OPTION**



towel rail (chrome)
N1L1 ref. nr. 118321300000099 (420 mm)
N2L1 ref. nr. 118321800000099 (420 mm)

Other accessories, see p. 63

ABOUT NIVA VERTICAL LACQUERED

Pure technical class, pure design, pure ambience

The ultra-compact, stylized Niva is still a founding example for many designers and colleague manufacturers. Completely functional due to the optimum air flow and the extra high heat output that starts immediately. Completely design due to the integrity, pure design, the floating character – thanks to the underlying invisible suspension and the organically integrated towel rail.



NIVA VERTICAL LACQUERED (N1L1, N2L1)




N1L1

N2L1


HOW TO ORDER NIVA VERTICAL LACQUERED

Delivery time 15 - 30 working days
(transport duration not included)

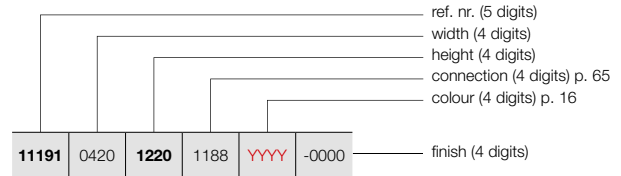

HOW TO ORDER STOCK RADIATOR NIVA VERTICAL LACQUERED

Delivery time 5 working days
(transport duration not included)



| REFERENCE CODE CUSTOM MADE NIVA VERTICAL LACQUERED | | | | | | | TECHNICAL DATA | | | | | short ref. nr. S600 stock | short ref. nr. M301 stock | | | |
|---|-----------------|------------------|--------------------|--------------------|--------|----------------|-------------------------|---------------------------------|------|------|------|---------------------------------|---------------------------------|---|----------|----------|
| tubes | width (L mm) | height (H mm) | 75/65/20 (Watt) | 55/45/20 (Watt) | n-exp. | weight (kg) | water content (l) | electr. resistance (Watt) | | | | | | | | |
| REF. NR. NIVA VERTICAL LACQUERED N1L1 : 11191 | | | | | | | | | | | | | | | | |
| 11191 | 0420 | 1220 | 1188 | YYYY | -0000 | - | 420 | 1220 | 645 | 337 | 1,27 | 18,10 | 2,55 | - | 11191-02 | - |
| | | 1820 | | | | - | 420 | 1820 | 934 | 486 | 1,28 | 27,35 | 3,70 | - | 11191-03 | 11191-05 |
| | | 2020 | | | | - | 420 | 2020 | 1023 | 532 | 1,28 | 30,20 | 4,00 | - | 11191-06 | - |
| | | 2220 | | | | - | 420 | 2220 | 1070 | 559 | 1,27 | 33,20 | 4,50 | - | - | - |
| 11191 | 0520 | 1220 | 1188 | YYYY | -0000 | - | 520 | 1220 | 815 | 424 | 1,28 | 21,97 | 3,32 | - | 11191-21 | - |
| | | 1820 | | | | - | 520 | 1820 | 1128 | 587 | 1,28 | 33,67 | 4,61 | - | 11191-16 | 11191-01 |
| | | 2020 | | | | - | 520 | 2020 | 1257 | 654 | 1,28 | 37,12 | 5,05 | - | 11191-22 | - |
| | | 2220 | | | | - | 520 | 2220 | 1310 | 681 | 1,28 | 40,88 | 5,57 | - | - | - |
| 11191 | 0620 | 1220 | 1188 | YYYY | -0000 | - | 620 | 1220 | 985 | 510 | 1,29 | 25,83 | 3,85 | - | 11191-07 | - |
| | | 1820 | | | | - | 620 | 1820 | 1322 | 687 | 1,28 | 39,98 | 5,52 | - | 11191-17 | 11191-04 |
| | | 2020 | | | | - | 620 | 2020 | 1490 | 775 | 1,28 | 44,03 | 6,10 | - | 11191-20 | - |
| | | 2220 | | | | - | 620 | 2220 | 1550 | 806 | 1,28 | 48,57 | 6,63 | - | - | - |
| 11191 | 0720 | 1820 | 1188 | YYYY | -0000 | - | 720 | 1820 | 1515 | 784 | 1,29 | 46,30 | 6,43 | - | 11191-08 | - |
| | | 2020 | | | | - | 720 | 2020 | 1724 | 897 | 1,28 | 50,95 | 7,15 | - | 11191-09 | - |
| | | 2220 | | | | - | 720 | 2220 | 1790 | 926 | 1,29 | 56,25 | 7,70 | - | - | - |
| REF. NR. NIVA VERTICAL LACQUERED N2L1 : 11192 | | | | | | | | | | | | | | | | |
| 11192 | 0420 | 1220 | 1188 | YYYY | -0000 | - | 420 | 1220 | 988 | 506 | 1,31 | 28,40 | 4,90 | - | 11192-01 | - |
| | | 1820 | | | | - | 420 | 1820 | 1330 | 681 | 1,31 | 42,23 | 7,28 | - | 11192-02 | 11192-03 |
| | | 2020 | | | | - | 420 | 2020 | 1438 | 736 | 1,31 | 46,75 | 8,00 | - | 11192-04 | - |
| | | 2220 | | | | - | 420 | 2220 | 1543 | 823 | 1,23 | 51,40 | 8,90 | - | - | - |
| 11192 | 0520 | 1220 | 1188 | YYYY | -0000 | - | 520 | 1220 | 1213 | 621 | 1,31 | 36,83 | 6,48 | - | 11192-05 | - |
| | | 1820 | | | | - | 520 | 1820 | 1633 | 836 | 1,31 | 51,68 | 9,07 | - | 11192-31 | 11192-06 |
| | | 2020 | | | | - | 520 | 2020 | 1764 | 903 | 1,31 | 57,23 | 10,00 | - | 11192-32 | - |
| | | 2220 | | | | - | 520 | 2220 | 1893 | 995 | 1,26 | 62,73 | 11,00 | - | - | - |
| 11192 | 0620 | 1220 | 1188 | YYYY | -0000 | - | 620 | 1220 | 1437 | 732 | 1,32 | 38,17 | 7,02 | - | 11192-37 | - |
| | | 1820 | | | | - | 620 | 1820 | 1935 | 991 | 1,31 | 61,14 | 10,86 | - | 11192-33 | 11192-12 |
| | | 2020 | | | | - | 620 | 2020 | 2091 | 1071 | 1,31 | 67,72 | 12,00 | - | 11192-34 | - |
| | | 2220 | | | | - | 620 | 2220 | 2243 | 1160 | 1,29 | 74,07 | 13,10 | - | - | - |
| 11192 | 0720 | 1820 | 1188 | YYYY | -0000 | - | 720 | 1820 | 2237 | 1146 | 1,31 | 70,60 | 12,65 | - | 11192-07 | - |
| | | 2020 | | | | - | 720 | 2020 | 2417 | 1238 | 1,31 | 78,20 | 14,00 | - | 11192-35 | - |
| | | 2220 | | | | - | 720 | 2220 | 2594 | 1322 | 1,32 | 85,40 | 15,20 | - | - | - |

CE in conformity with EN442-1: radiators and convectors

For heat outputs in other regimes, see p. 308 (correction factors)

NIVA VERTICAL STAINLESS STEEL (N1L1-ES, N2L1-ES)

TYPES

- Single (N1L1-ES) and double (N2L1-ES)

COLOURS

- Stainless steel type 316L, matt brushed with grain 360

SPECIAL

- The Niva Vertical Stainless Steel is available with a front plate in stainless steel (this means steel plate radiator + front plate in stainless steel).
- The Niva Vertical Stainless Steel is standard delivered with a maintenance product for stainless steel.
- This maintenance product can not be delivered subsequently by Vasco.

BRACKETS

- Wall brackets in the colour RAL 7016 (anthracite grey) standard. Also in option available in the colour S600 (see p. 62).

TECHNICAL

- Electrically welded by means of resistance welding robots (invisible weld seams)
- Standard operating pressure: 10 bar
- Maximum operating temperature: 110°C

ELECTRICAL (see chapter electrical radiators)

- ✗ Pure electrical radiator prefilled
- ✗ Mixed radiator

TECHNICAL DRAWINGS

- See p. 66

CONNECTION


- ✗ One-point connection for one-pipe system
- ✗ One-point connection for two-pipe system
- ✓ Two-point connection for one-pipe system (connection by way of the central connection) (see p. 300)
- ✓ Two-point connection for two-pipe system (standard) (see p. 300)
- ✗ Integrated valve



VASCO

STEEL RADIATORS

RECOMMENDED CONNECTION (1188)



Other connection methods, see p. 65



ref. nr. 118210300009993
Fittings, see p. 313

RECOMMENDED FOR THE BATHROOM IN OPTION



towel rail (stainless steel)
N1L1-ES ref. nr. 118321400009993 (520 mm)
N2L1-ES ref. nr. 118321900009993 (520 mm)

Other accessories, see p. 63

ABOUT NIVA VERTICAL STAINLESS STEEL

Pure class in all its glory

The Niva Vertical Stainless Steel combines steel plate construction with a stainless steel front plate which gives it a pure and clean design and its floating appearance gives the Niva 'extra shine'. The Niva Vertical Stainless Steel designer radiator is also available with an organically integrated stainless steel towel rail (optional).



NIVA VERTICAL STAINLESS STEEL (N1L1-ES, N2L1-ES)

HOW TO ORDER NIVA VERTICAL STAINLESS STEEL


Delivery time 15 - 30 working days
(transport duration not included)



N1L1-ES



N2L1-ES

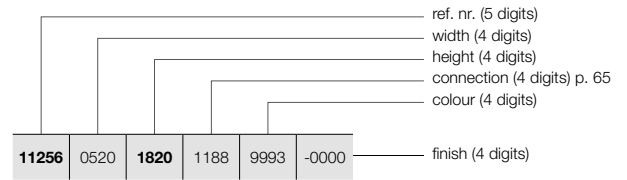

| REFERENCE CODE CUSTOM MADE NIVA VERTICAL STAINLESS STEEL | TECHNICAL DATA | | | | | | | | | | short ref. nr. stainless steel stock | | | | |
|---|----------------|-----------------|------------------|--------------------|--------------------|--------|----------------|-------------------------|---------------------------------|------|--|-------|-------|---|---|
| | tubes | width (L mm) | height (H mm) | 75/65/20 (Watt) | 55/45/20 (Watt) | n-exp. | weight (kg) | water content (l) | electr. resistance (Watt) | | | | | | |
| REF. NR. VERTICAL STAINLESS STEEL N1L1-ES : 11256 | | | | | | | | | | | | | | | |
| 11256 | 0520 | 1820 | 1188 | 9993 | -0000 | - | 520 | 1820 | 1128 | 587 | 1,28 | 33,67 | 4,61 | - | - |
| | | 2020 | | | | - | 520 | 2020 | 1257 | 654 | 1,28 | 37,12 | 5,05 | - | - |
| 11256 | 0620 | 1820 | 1188 | 9993 | -0000 | - | 620 | 1820 | 1322 | 687 | 1,28 | 39,98 | 5,52 | - | - |
| | | 2020 | | | | - | 620 | 2020 | 1490 | 775 | 1,28 | 44,03 | 6,10 | - | - |
| REF. NR. VERTICAL STAINLESS STEEL N2L1-ES : 11257 | | | | | | | | | | | | | | | |
| 11257 | 0520 | 1820 | 1188 | 9993 | -0000 | - | 520 | 1820 | 1633 | 836 | 1,31 | 51,68 | 9,07 | - | - |
| | | 2020 | | | | - | 520 | 2020 | 1764 | 903 | 1,31 | 57,23 | 10,00 | - | - |
| 11257 | 0620 | 1820 | 1188 | 9993 | -0000 | - | 620 | 1820 | 1935 | 991 | 1,31 | 61,14 | 10,86 | - | - |
| | | 2020 | | | | - | 620 | 2020 | 2091 | 1071 | 1,31 | 67,72 | 12,00 | - | - |

CE in conformity with EN442-1: radiators and convectors

For heat outputs in other regimes, see p. 308 (correction factors)

TYPES

- NH1L1, NH2L1, NH2L2

COLOURS

- Standard colour S600 (fine texture white)
- Not available in colours Gloss White and Jet Black
- Extensive colour chart see p. 16

SPECIAL

- The Niva Horizontal Lacquered is available with 1 (NH1L1, NH2L1) or 2 rows (NH2L2) of steel fins at the back of the tubes in order to increase the heat output.
- NH1L1 also available as toilet radiator (520 x 450 mm)

BRACKETS

- Wall brackets in the colour RAL 7016 (anthracite grey) standard. Also in option available in the colour S600 (see p. 62).

TECHNICAL

- Electrically welded by means of resistance welding robots (invisible weld seams)
- KTL priming coat, powder coating
- Standard operating pressure: 10 bar
- Maximum operating temperature: 110°C

ELECTRICAL (see chapter electrical radiators)


- ✗ Pure electrical radiator prefilled
- ✗ Mixed radiator

TECHNICAL DRAWINGS

- See p. 67

CONNECTION


- ✗ One-point connection for one-pipe system
- ✗ One-point connection for two-pipe system
- ✓ Two-point connection for one-pipe system (connection by way of the integrated valve) (see p. 302)
- ✓ Two-point connection for two-pipe system (standard) (see p. 300)
- ✓ Integrated valve (**no extra charge**) (see p. 302)

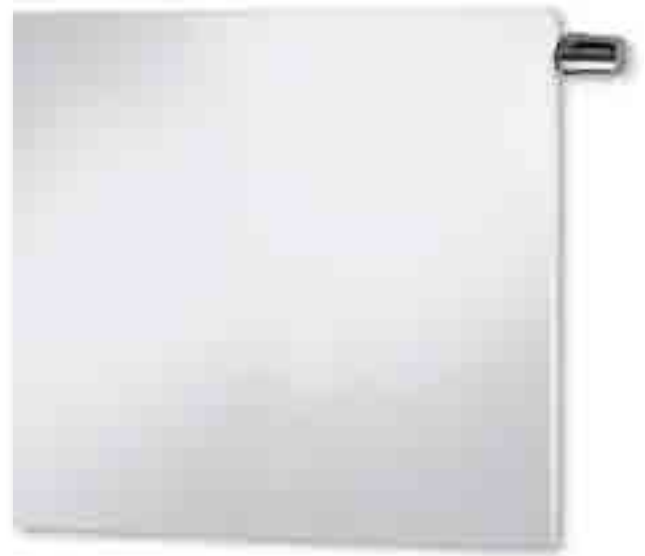

INTEGRATED VALVE NIVA HORIZONTAL LACQUERED

- Radiator in white: thermostatic head in white standard, included in the price
- Radiator in colour: thermostatic head in chrome plated standard, included in the price
- **Thermostatic head in another colour is possible in option – not included in the price**

RECOMMENDED CONNECTION (0098) INTEGRATED VALVE



Other connection methods, see p. 65



ref. nr. 118230000000099
Fittings, see p. 313

RECOMMENDED FOR THE BATHROOM IN OPTION



towel rail (chrome)
ref. nr. 118321700000099

ABOUT NIVA HORIZONTAL LACQUERED

Pure class in all its simplicity

Also in the horizontal version, the Niva remains an epitome of efficiently applied design. A successful combination of functionality and design, with the choice of one or two blades for a customised heat output. Also available in the toilet version. With optional towel rail in a chrome finish.


NIVA HORIZONTAL (NH1L1, NH2L1)



NH1L1 / NH2L1


HOW TO ORDER NIVA HORIZONTAL LACQUERED

Delivery time 15 - 30 working days
(transport duration not included)

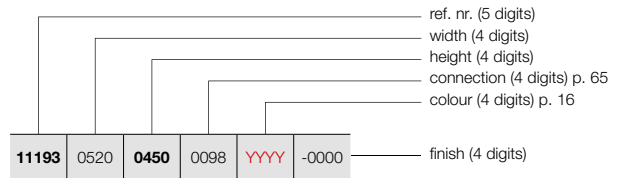

HOW TO ORDER STOCK RADIATOR NIVA HORIZONTAL LACQUERED

Delivery time 5 working days
(transport duration not included)




| REFERENCE CODE CUSTOM MADE NIVA HORIZONTAL LACQUERED | | | | | | | TECHNICAL DATA | | | | | | | short ref. nr. S600 stock | |
|---|-----------------|------------------|--------------------|--------------------|--------|----------------|-------------------------|---------------------------------|------|------|------|-------|-------|---------------------------------|----------|
| REF. NR. | width (L mm) | height (H mm) | 75/65/20 (Watt) | 55/45/20 (Watt) | n-exp. | weight (kg) | water content (l) | electr. resistance (Watt) | | | | | | | |
| REF. NR. NIVA HORIZONTAL LACQUERED NH1L1 : 11193 | | | | | | | | | | | | | | | |
| 11193 | 0520 | 0450 | 0098 | YYYY | -0000 | - | 520 | 450 | 301 | 158 | 1,26 | 7,50 | 1,19 | - | 11193-01 |
| 11193 | 0620 | 0550 | 0098 | YYYY | -0000 | - | 620 | 550 | 425 | 223 | 1,26 | 11,11 | 1,66 | - | - |
| | | 0650 | | | | - | 620 | 650 | 490 | 256 | 1,27 | 13,28 | 1,92 | - | - |
| 11193 | 0820 | 0550 | 0098 | YYYY | -0000 | - | 820 | 550 | 562 | 295 | 1,26 | 14,69 | 2,20 | - | - |
| | | 0650 | | | | - | 820 | 650 | 649 | 339 | 1,27 | 17,56 | 2,53 | - | - |
| 11193 | 1020 | 0550 | 0098 | YYYY | -0000 | - | 1020 | 550 | 699 | 367 | 1,26 | 18,28 | 2,73 | - | - |
| | | 0650 | | | | - | 1020 | 650 | 807 | 422 | 1,27 | 21,85 | 3,15 | - | - |
| | | 0950 | | | | - | 1020 | 950 | 1124 | 585 | 1,28 | 31,85 | 4,40 | - | - |
| 11193 | 1220 | 0550 | 0098 | YYYY | -0000 | - | 1220 | 550 | 836 | 439 | 1,26 | 21,86 | 3,27 | - | - |
| | | 0650 | | | | - | 1220 | 650 | 965 | 504 | 1,27 | 26,13 | 3,77 | - | - |
| | | 0950 | | | | - | 1220 | 950 | 1344 | 699 | 1,28 | 38,10 | 5,26 | - | - |
| REF. NR. NIVA HORIZONTAL LACQUERED NH2L1 : 11194 | | | | | | | | | | | | | | | |
| 11194 | 0620 | 0550 | 0098 | YYYY | -0000 | - | 620 | 550 | 611 | 318 | 1,28 | 17,25 | 3,27 | - | - |
| | | 0650 | | | | - | 620 | 650 | 708 | 370 | 1,27 | 20,70 | 3,83 | - | - |
| 11194 | 0820 | 0550 | 0098 | YYYY | -0000 | - | 820 | 550 | 809 | 421 | 1,28 | 22,81 | 4,32 | - | - |
| | | 0650 | | | | - | 820 | 650 | 936 | 489 | 1,27 | 27,37 | 5,07 | - | - |
| 11194 | 1020 | 0550 | 0098 | YYYY | -0000 | - | 1020 | 550 | 1006 | 523 | 1,28 | 28,38 | 5,38 | - | 11194-08 |
| | | 0650 | | | | - | 1020 | 650 | 1165 | 609 | 1,27 | 34,05 | 6,30 | - | 11194-23 |
| | | 0950 | | | | - | 1020 | 950 | 1630 | 839 | 1,30 | 50,20 | 9,05 | - | - |
| 11194 | 1220 | 0550 | 0098 | YYYY | -0000 | - | 1220 | 550 | 1203 | 626 | 1,28 | 33,94 | 6,43 | - | - |
| | | 0650 | | | | - | 1220 | 650 | 1393 | 728 | 1,27 | 40,72 | 7,54 | - | - |
| | | 0950 | | | | - | 1220 | 950 | 1950 | 1004 | 1,30 | 60,05 | 10,82 | - | - |
| 11194 | 1420 | 0550 | 0098 | YYYY | -0000 | - | 1420 | 550 | 1400 | 728 | 1,28 | 39,50 | 7,48 | - | - |
| | | 0650 | | | | - | 1420 | 650 | 1622 | 848 | 1,27 | 47,40 | 8,78 | - | - |
| 11194 | 1620 | 0550 | 0098 | YYYY | -0000 | - | 1620 | 550 | 1597 | 830 | 1,28 | 45,07 | 8,54 | - | - |
| | | 0650 | | | | - | 1620 | 650 | 1850 | 967 | 1,27 | 54,08 | 10,01 | - | - |

CE in conformity with EN442-1: radiators and convectors

For heat outputs in other regimes, see p. 308 (correction factors)

HOW TO ORDER NIVA HORIZONTAL LACQUERED

Delivery time 15 - 30 working days
(transport duration not included)

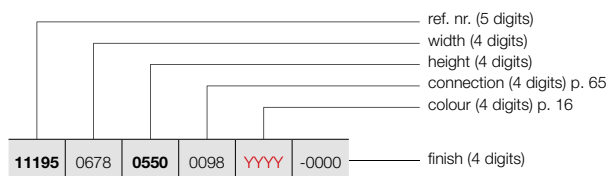


NIVA HORIZONTAL (NH2L2)



NH2L2

HOW TO ORDER STOCK RADIATOR NIVA HORIZONTAL LACQUERED

Delivery time 5 working days
(transport duration not included)



| REFERENCE CODE CUSTOM MADE NIVA HORIZONTAL LACQUERED | | | | | | | TECHNICAL DATA | | | | | | short ref. nr. S600 stock | | |
|---|------|-------------|------|------|-------|---|----------------|-----------------|------------------|--------------------|--------------------|--------|---------------------------------|----------------|-------------------------|
| | | | | | | | tubes | width (L mm) | height (H mm) | 75/65/20 (Watt) | 55/45/20 (Watt) | n-exp. | | weight (kg) | water content (l) |
| REF. NR. NIVA HORIZONTAL LACQUERED NH2L2 : 11195 | | | | | | | | | | | | | | | |
| 11195 | 0678 | 0550 | 0098 | YYYY | -0000 | - | 678 | 550 | 804 | 416 | 1,29 | 20,50 | 3,40 | - | - |
| | | 0650 | | | | - | 678 | 650 | 941 | 487 | 1,29 | 24,28 | 3,93 | - | - |
| 11195 | 0878 | 0550 | 0098 | YYYY | -0000 | - | 878 | 550 | 1041 | 539 | 1,29 | 26,55 | 4,40 | - | - |
| | | 0650 | | | | - | 878 | 650 | 1219 | 631 | 1,29 | 31,44 | 5,09 | - | - |
| 11195 | 1078 | 0550 | 0098 | YYYY | -0000 | - | 1078 | 550 | 1279 | 662 | 1,29 | 32,60 | 5,40 | - | 11195-15 |
| | | 0650 | | | | - | 1078 | 650 | 1496 | 774 | 1,29 | 38,60 | 6,25 | - | 11195-16 |
| | | 0950 | | | | - | 1078 | 950 | 2027 | 1043 | 1,30 | 57,90 | 9,00 | - | - |
| 11195 | 1278 | 0550 | 0098 | YYYY | -0000 | - | 1278 | 550 | 1516 | 784 | 1,29 | 38,65 | 6,40 | - | - |
| | | 0650 | | | | - | 1278 | 650 | 1774 | 918 | 1,29 | 45,77 | 7,41 | - | - |
| | | 0950 | | | | - | 1278 | 950 | 2403 | 1237 | 1,30 | 68,64 | 10,67 | - | - |
| 11195 | 1478 | 0550 | 0098 | YYYY | -0000 | - | 1478 | 550 | 1753 | 907 | 1,29 | 44,69 | 7,40 | - | - |
| | | 0650 | | | | - | 1478 | 650 | 2051 | 1061 | 1,29 | 52,93 | 8,57 | - | - |
| 11195 | 1678 | 0550 | 0098 | YYYY | -0000 | - | 1678 | 550 | 1990 | 1030 | 1,29 | 50,74 | 8,41 | - | - |
| | | 0650 | | | | - | 1678 | 650 | 2329 | 1205 | 1,29 | 60,09 | 9,73 | - | - |

CE05 in conformity with EN442-1: radiators and convectors

For heat outputs in other regimes, see p. 308 (correction factors)

NIVA SOFT VERTICAL (NS1L1, NS2L1)



TYPES

- Single (NS1L1) and double (NS2L1)

COLOURS

- Standard colour S600 (fine texture white)
- Not available in colours Gloss White and Jet Black
- Extensive colour chart see p. 16

SPECIAL

- The Niva Soft Vertical is available with a lacquered front plate (this means steel plate radiator + lacquered front plate).
- With a flat front plate and rounded sides as a modern-day touch
- Thermostatic head at doorknob height (see p. 302).



BRACKETS

- Wall brackets in the colour RAL 7016 (anthracite grey) standard. Also in option available in the colour S600 (see p. 62).

TECHNICAL

- Electrically welded by means of resistance welding robots (invisible weld seams)
- KTL priming coat, powder coating
- Standard operating pressure: 10 bar
- Maximum operating temperature: 110°C

ELECTRICAL (see chapter electrical radiators)

- ✗ Pure electrical radiator prefilled
- ✗ Mixed radiator

TECHNICAL DRAWINGS

- See p. 68

CONNECTION


- ✗ One-point connection for one-pipe system
- ✗ One-point connection for two-pipe system
- ✓ Two-point connection for one-pipe system (connection by way of the central connection) (see p. 300)
- ✓ Two-point connection for two-pipe system (standard) (see p. 300)
- ✓ Integrated valve (**extra charge**) (see p. 302)

ABOUT NIVA SOFT VERTICAL


Pure class in all its creativity

The Niva in all its compact, stylish simplicity, but designed with softly rounded edges. A designer radiator that perfectly comes into its own with both a minimalist interior and a contemporary retro surround. Available with a thermostat knob at doorknob height.

RECOMMENDED CONNECTION INTEGRATED VALVE (0098)



Other connection methods, see p. 65



ref. nr. 118210300000099
Fittings, see p. 313

RECOMMENDED FOR THE BATHROOM IN OPTION



towel rail (aluminium)
NS1L1 ref. nr. 118323900000000
NS2L1 ref. nr. 118324000000000

Other accessories, see p. 63




ref. nr. 118230100000099
Fittings, see p. 313




HOW TO ORDER NIVA SOFT

Delivery time 15 - 30 working days
(transport duration not included)

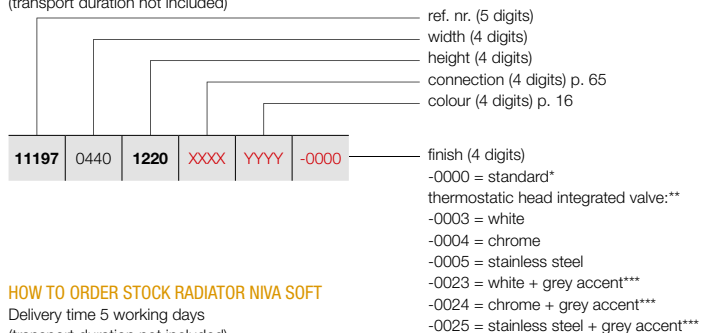

HOW TO ORDER STOCK RADIATOR NIVA SOFT

Delivery time 5 working days
(transport duration not included)



NIVA SOFT VERTICAL (NS1L1, NS2L1)



NS1L1



NS2L1

* without integrated valve
** always connection 0098
*** only for colour S600

| REFERENCE CODE CUSTOM MADE NIVA SOFT VERTICAL | | | | | | | TECHNICAL DATA | | | | | | short ref. nr. S600 stock | | |
|--|------|------|------|------|-------|---|----------------|--------------|---------------|-----------------|-----------------|--------|---------------------------|-------------|-------------------|
| | | | | | | | tubes | width (L mm) | height (H mm) | 75/65/20 (Watt) | 55/45/20 (Watt) | n-exp. | | weight (kg) | water content (l) |
| REF. NR. NIVA SOFT VERTICAL NS1L1 : 11197 | | | | | | | | | | | | | | | |
| 11197 | 0440 | 1220 | XXXX | YYYY | -0000 | - | 440 | 1220 | 645 | 337 | 1,27 | 18,10 | 2,55 | - | 11197-06 |
| | | 1820 | | | | - | 440 | 1820 | 934 | 486 | 1,28 | 27,35 | 3,70 | - | 11197-07 |
| | | 2020 | | | | - | 440 | 2020 | 1023 | 532 | 1,28 | 30,20 | 4,00 | - | 11197-08 |
| | | 2220 | | | | - | 440 | 2220 | 1070 | 559 | 1,27 | 33,20 | 4,50 | - | - |
| 11197 | 0540 | 1220 | XXXX | YYYY | -0000 | - | 540 | 1220 | 815 | 424 | 1,28 | 21,97 | 3,32 | - | 11197-04 |
| | | 1820 | | | | - | 540 | 1820 | 1128 | 587 | 1,28 | 33,67 | 4,61 | - | 11197-01 |
| | | 2020 | | | | - | 540 | 2020 | 1257 | 654 | 1,28 | 37,12 | 5,05 | - | 11197-05 |
| | | 2220 | | | | - | 540 | 2220 | 1310 | 681 | 1,28 | 40,88 | 5,57 | - | - |
| 11197 | 0640 | 1220 | XXXX | YYYY | -0000 | - | 640 | 1220 | 985 | 510 | 1,29 | 25,83 | 3,85 | - | 11197-09 |
| | | 1820 | | | | - | 640 | 1820 | 1322 | 687 | 1,28 | 39,98 | 5,52 | - | 11197-02 |
| | | 2020 | | | | - | 640 | 2020 | 1490 | 775 | 1,28 | 44,03 | 6,10 | - | 11197-03 |
| | | 2220 | | | | - | 640 | 2220 | 1550 | 806 | 1,28 | 48,57 | 6,63 | - | - |
| 11197 | 0740 | 1820 | XXXX | YYYY | -0000 | - | 740 | 1820 | 1515 | 784 | 1,29 | 46,30 | 6,43 | - | 11197-10 |
| | | 2020 | | | | - | 740 | 2020 | 1724 | 897 | 1,28 | 50,95 | 7,15 | - | 11197-11 |
| | | 2220 | | | | - | 740 | 2220 | 1790 | 926 | 1,29 | 56,25 | 7,70 | - | - |
| REF. NR. NIVA SOFT VERTICAL NS2L1 : 11198 | | | | | | | | | | | | | | | |
| 11198 | 0440 | 1220 | XXXX | YYYY | -0000 | - | 440 | 1220 | 988 | 506 | 1,31 | 28,40 | 4,90 | - | 11198-06 |
| | | 1820 | | | | - | 440 | 1820 | 1330 | 681 | 1,31 | 42,23 | 7,28 | - | 11198-08 |
| | | 2020 | | | | - | 440 | 2020 | 1438 | 736 | 1,31 | 46,75 | 8,00 | - | 11198-09 |
| | | 2220 | | | | - | 440 | 2220 | 1543 | 823 | 1,23 | 51,40 | 8,90 | - | - |
| 11198 | 0540 | 1220 | XXXX | YYYY | -0000 | - | 540 | 1220 | 1213 | 621 | 1,31 | 36,83 | 6,48 | - | 11198-10 |
| | | 1820 | | | | - | 540 | 1820 | 1633 | 836 | 1,31 | 51,68 | 9,07 | - | 11198-01 |
| | | 2020 | | | | - | 540 | 2020 | 1764 | 903 | 1,31 | 57,23 | 10,00 | - | 11198-02 |
| | | 2220 | | | | - | 540 | 2220 | 1893 | 995 | 1,26 | 62,73 | 11,00 | - | - |
| 11198 | 0640 | 1220 | XXXX | YYYY | -0000 | - | 640 | 1220 | 1437 | 732 | 1,32 | 38,17 | 7,02 | - | 11198-07 |
| | | 1820 | | | | - | 640 | 1820 | 1935 | 991 | 1,31 | 61,14 | 10,86 | - | 11198-03 |
| | | 2020 | | | | - | 640 | 2020 | 2091 | 1071 | 1,31 | 67,72 | 12,00 | - | 11198-04 |
| | | 2220 | | | | - | 640 | 2220 | 2243 | 1160 | 1,29 | 74,07 | 13,10 | - | - |
| 11198 | 0740 | 1820 | XXXX | YYYY | -0000 | - | 740 | 1820 | 2237 | 1146 | 1,31 | 70,60 | 12,65 | - | 11198-11 |
| | | 2020 | | | | - | 740 | 2020 | 2417 | 1238 | 1,31 | 78,20 | 14,00 | - | 11198-05 |
| | | 2220 | | | | - | 740 | 2220 | 2594 | 1322 | 1,32 | 85,40 | 15,20 | - | - |

CE 09 in conformity with EN442-1: radiators and convectors






For heat outputs in other regimes, see p. 308 (correction factors)

| BRACKETS | | HEIGHT RADIATOR | COLOUR | REF.NR. |
|--------------------------------|--|-----------------|--------|-----------------|
| N1L1 / N1L1-ES / NS1L1* | | | | |
| WALL BRACKET |  | 1220 mm | S600 | 118710411000600 |
| | | 1820 mm | S600 | 118710417000600 |
| | | 2020 mm | S600 | 118710419000600 |
| | | 2220 mm | S600 | 118710421000600 |
| N2L1 / N2L1-ES / NS2L1 | | | | |
| WALL BRACKET |  | 1220 mm | S600 | 118710511000600 |
| | | 1820 mm | S600 | 118710517000600 |
| | | 2020 mm | S600 | 118710519000600 |
| | | 2220 mm | S600 | 118710521000600 |
| NH1L1 | | | | |
| WALL BRACKET |  | 450 mm | S600 | 118710204000600 |
| | | 550 mm | S600 | 118710205000600 |
| | | 650 mm | S600 | 118710206000600 |
| | | 950 mm | S600 | 118710209000600 |
| NH2L1 / NH2L2 | | | | |
| WALL BRACKET |  | 550 mm | S600 | 118710305000600 |
| | | 650 mm | S600 | 118710306000600 |
| | | 950 mm | S600 | 118710309000600 |

* not available for NS1L1 with integrated valve

| ACCESSORIES | WIDTH TOWEL RAIL | COLOUR | REF.NR. | |
|---|--|-------------------------------|----------------|----------------|
| SHORT BRACKET  <ul style="list-style-type: none"> • N1L1 / N1L1-ES: d = 66,5 mm; a = 56,5 mm • NS1L1: d = 68 mm; a = 58 mm • N2L1 / N2L1-ES: d = 59,5 mm; a = 49,5 mm • NS2L1: d = 58 mm; a = 48 mm | N1L1 / N1L1-ES / NS1L1 | | | |
| | 240 mm | WHITE | 11837100000600 | |
| | 240 mm | BLACK | 11837100000300 | |
| | 240 mm | PIGEON BLUE | 11837100000601 | |
| | N2L1 / N2L1-ES / NS2L1 | | | |
| | 240 mm | WHITE | 11837200000600 | |
| | 240 mm | BLACK | 11837200000300 | |
| | 240 mm | PIGEON BLUE | 11837200000601 | |
| | LONG BRACKET  <ul style="list-style-type: none"> • N1L1 / N1L1-ES: d = 66,5 mm; a = 56,5 mm • NS1L1: d = 68 mm; a = 58 mm • N2L1 / N2L1-ES: d = 59,5 mm; a = 49,5 mm • NS2L1: d = 58 mm; a = 48 mm | N1L1 / N1L1-ES / NS1L1 | | |
| | | 440 mm | WHITE | 11837110000600 |
| 440 mm | | BLACK | 11837110000300 | |
| 440 mm | | PIGEON BLUE | 11837110000601 | |
| N2L1 / N2L1-ES / NS2L1 | | | | |
| 440 mm | | WHITE | 11837210000600 | |
| 440 mm | | BLACK | 11837210000300 | |
| 440 mm | | PIGEON BLUE | 11837210000601 | |
| RECTANGULAR BRACKET  <ul style="list-style-type: none"> • N1L1 / N1L1-ES: d = 66,5 mm; a = 56,5 mm • NS1L1: d = 68 mm; a = 58 mm • N2L1 / N2L1-ES: d = 59,5 mm; a = 49,5 mm • NS2L1: d = 58 mm; a = 48 mm | | N1L1 / N1L1-ES / NS1L1 | | |
| | | 286 x 110 mm | WHITE | 11837120000600 |
| | 286 x 110 mm | BLACK | 11837120000300 | |
| | 286 x 110 mm | PIGEON BLUE | 11837120000601 | |
| | N2L1 / N2L1-ES / NS2L1 | | | |
| | 286 x 110 mm | WHITE | 11837220000600 | |
| | 286 x 110 mm | BLACK | 11837220000300 | |
| | 286 x 110 mm | PIGEON BLUE | 11837220000601 | |
| | SQUARE BRACKET  <ul style="list-style-type: none"> • N1L1 / N1L1-ES: d = 66,5 mm; a = 56,5 mm • NS1L1: d = 68 mm; a = 58 mm • N2L1 / N2L1-ES: d = 59,5 mm; a = 49,5 mm • NS2L1: d = 58 mm; a = 48 mm | N1L1 / N1L1-ES / NS1L1 | | |
| | | 240 x 240 mm | WHITE | 11837130000600 |
| 240 x 240 mm | | BLACK | 11837130000300 | |
| 240 x 240 mm | | PIGEON BLUE | 11837130000601 | |
| N2L1 / N2L1-ES / NS2L1 | | | | |
| 240 x 240 mm | | WHITE | 11837230000600 | |
| 240 x 240 mm | | BLACK | 11837230000300 | |
| 240 x 240 mm | | PIGEON BLUE | 11837230000601 | |

d = distance front of the accessory up to front of the radiator
a = distance accessory up to the radiator
available from stock


| ACCESSORIES | WIDTH RADIATOR | COLOUR | REF.NR. |
|--|---|-----------|---------------------------------|
| N1L1 / N1L1-ES | | | |
| TOWEL RAIL |  | 420 mm | CHROME 11832130000099 |
| | | 520 mm | CHROME 11832140000099 |
| | | 520 mm | STAINLESS STEEL 118321400009993 |
| | | 620 mm | CHROME 11832150000099 |
| | | 620 mm | STAINLESS STEEL 118321500009993 |
| | | 720 mm | CHROME 11832160000099 |
| • h = 25 mm; b = 440, 540, 640, 740 mm; d = 73 mm; a = 57 mm | | | |
| N2L1 / N2L1-ES | | | |
| TOWEL RAIL |  | 420 mm | CHROME 11832180000099 |
| | | 520 mm | CHROME 11832190000099 |
| | | 520 mm | STAINLESS STEEL 118321900009993 |
| | | 620 mm | CHROME 11832200000099 |
| | | 620 mm | STAINLESS STEEL 118322000009993 |
| | | 720 mm | CHROME 11832210000099 |
| • h = 25 mm; b = 440, 540, 640, 740 mm; d = 73 mm; a = 57 mm | | | |
| NH1L1 / NH2L1 / NH2L2 | | | |
| TOWEL RAIL |  | CHROME | 11832170000099 |
| • h = 25 mm; b = 740 mm (easy adjustable); d = 73 mm; a = 57 mm | | | |
| N1L1 / N1L1-ES / NS1L1 | | | |
| TOWEL RAIL |  | ALUMINIUM | 11832390000000 |
| | | COPPER | 11832390000029 |
| • Towel rail in aluminium • h = 55 mm; b = 326 mm; d = 57 mm; a = 51 mm | | | |
| N2L1 / N2L1-ES / NS2L1 | | | |
| TOWEL RAIL |  | ALUMINIUM | 11832400000000 |
| | | COPPER | 11832400000029 |
| • Towel rail in aluminium • h = 55 mm; b = 326 mm; d = 57 mm; a = 51 mm | | | |

d = distance front of the accessory up to front of the radiator
a = distance accessory up to the radiator
available from stock

NIVA VERTICAL LACQUERED: N1L1 / N2L1


NIVA VERTICAL STAINLESS STEEL: N1L1-ES / N2L1-ES

NIVA SOFT VERTICAL: NS1L1 / NS2L1 (WITHOUT INTEGRATED VALVE)

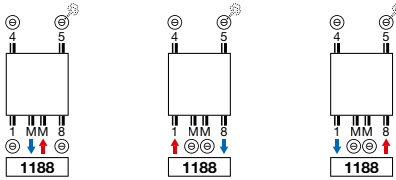


- **Attention: MM with supply on the right.**

NIVA SOFT VERTICAL: NS1L1 / NS2L1
INTEGRATED VALVE



- supplement
- **Attention: MM with supply on the right (on this connection, there is a flow tube at the back).**


NIVA HORIZONTAL LACQUERED: NH1L1 / NH2L1 / NH2L2

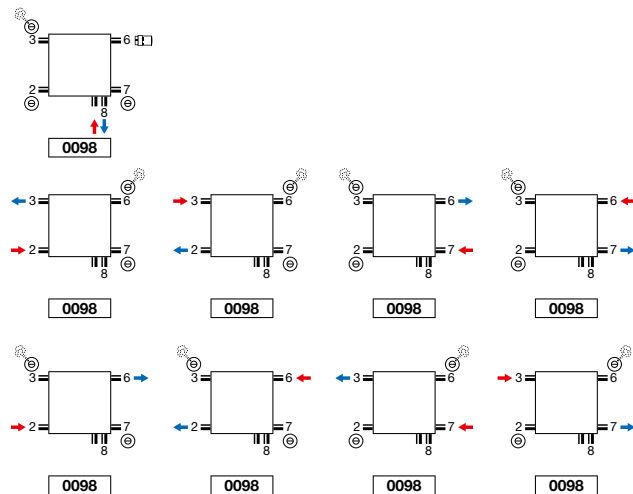

- **Integrated valve: no extra charge (see p. 302)**
- **Thermostatic head only to use with connection on the valve (supply left, return right). Other connections, eg. 23, take thermostatic head out of connection 6. Here the possibility to change the supply and the return.**

Attention: connecting the radiator can only be as shown by the connecting icons. For any other connection method, we take no responsibility.


NIVA VERTICAL LACQUERED (N1L1, N2L1)

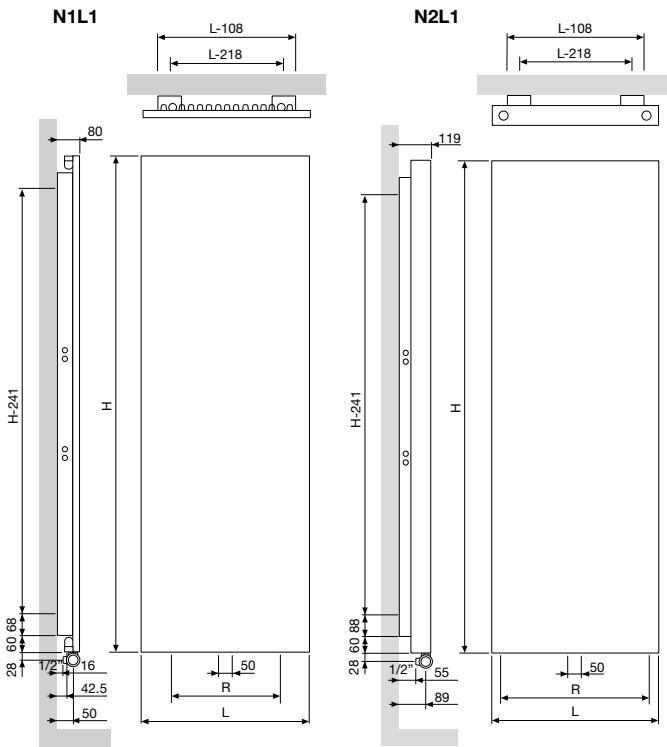

| N1L1 | | | | |
|---|-------|-------|-----|-----|
| Width (L) | 420 | 520 | 620 | 720 |
| Centre between the connections at the bottom 18 (R) | 200 | 300 | 400 | 500 |
| Centre between the brackets | L-218 | H-241 | | |

| N2L1 | | | | |
|---|-------|-------|-----|-----|
| Width (L) | 420 | 520 | 620 | 720 |
| Centre between the connections at the bottom 18 (R) | 338 | 438 | 538 | 638 |
| Centre between the brackets | L-218 | H-241 | | |

NIVA VERTICAL STAINLESS STEEL (N1L1-ES, N2L1-ES)

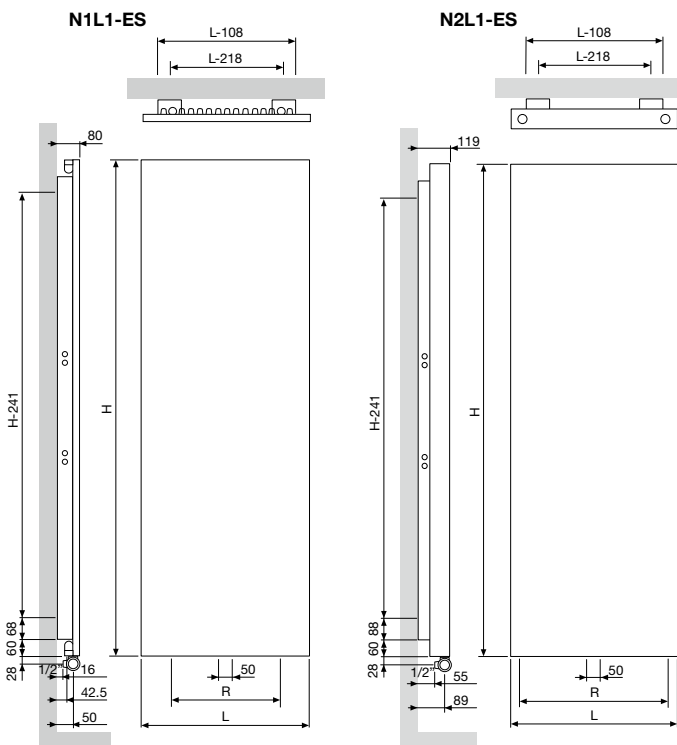


| N1L1-ES | | | | |
|---|-------|-------|--|--|
| Width (L) | 520 | 620 | | |
| Centre between the connections at the bottom 18 (R) | 300 | 400 | | |
| Centre between the brackets | L-218 | H-241 | | |

| N2L1-ES | | | | |
|---|-------|-------|--|--|
| Width (L) | 520 | 620 | | |
| Centre between the connections at the bottom 18 (R) | 438 | 538 | | |
| Centre between the brackets | L-218 | H-241 | | |

NIVA HORIZONTAL LACQUERED (NH1L1, NH2L1)

NH1L1 / NH2L1

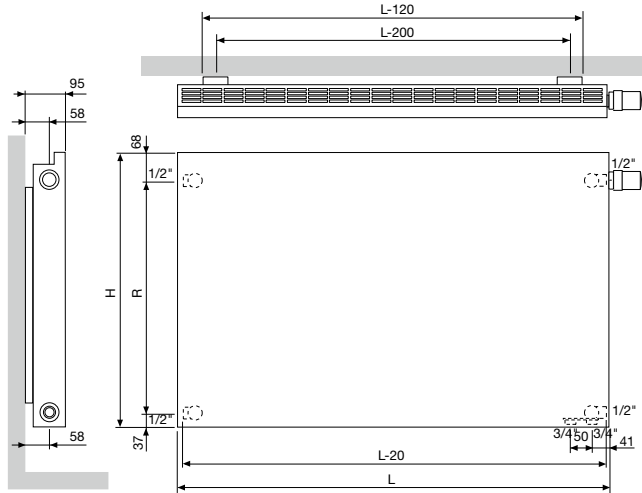


| NH1L1 | | | |
|--|-------|-----|-----|
| Height (H) | 450 | 550 | 650 |
| Centre between the lateral connections 23/67 (R) | 345 | 445 | 545 |
| Centre between the brackets | L-200 | | |

| NH2L1 | | | |
|--|-------|-----|-----|
| Height (H) | 550 | 650 | 950 |
| Centre between the lateral connections 23/67 (R) | 445 | 545 | 845 |
| Centre between the brackets | L-200 | | |





NIVA HORIZONTAL LACQUERED (NH2L2)

NH2L2

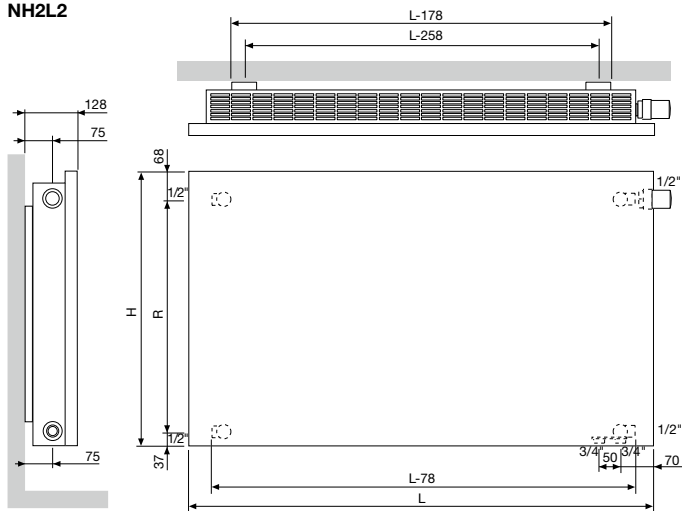

| NH2L2 | | | |
|--|-------|-----|-----|
| Height (H) | 550 | 650 | 950 |
| Centre between the lateral connections 23/67 (R) | 445 | 545 | 845 |
| Centre between the brackets | L-258 | | |

NIVA SOFT VERTICAL (NS1L1, NS2L1)

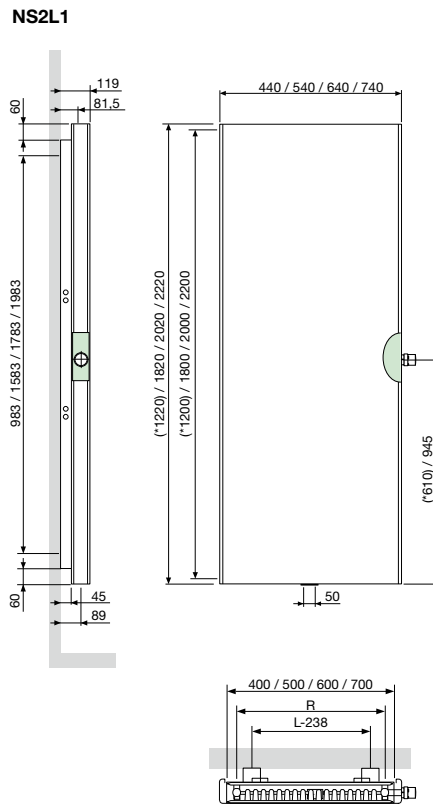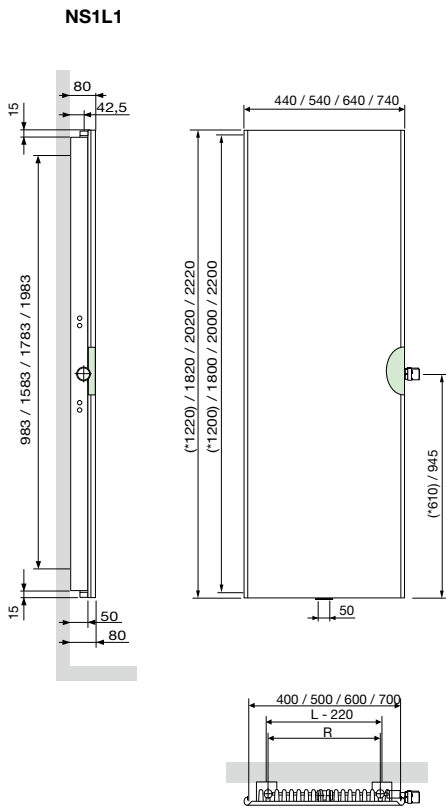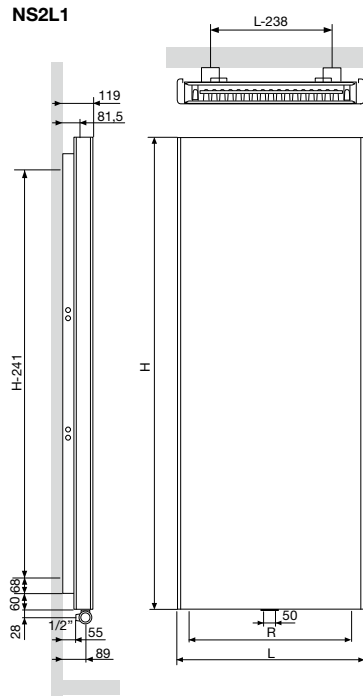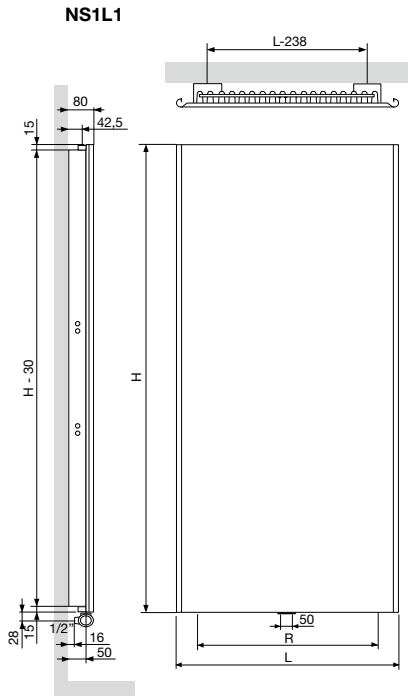

| | NS1L1 | | | |
|---|-------|-------|-----|-----|
| Width (L) | 440 | 540 | 640 | 740 |
| Centre between the connections at the bottom 18 (R) | 200 | 300 | 400 | 500 |
| Centre between the brackets | L-238 | H-241 | | |

| | NS2L1 | | | |
|---|-------|-------|-----|-----|
| Width (L) | 440 | 540 | 640 | 740 |
| Centre between the connections at the bottom 18 (R) | 338 | 438 | 538 | 638 |
| Centre between the brackets | L-238 | H-241 | | |